

**FAG****B71913-E-2RSD-T-P4S-UL**

Spindle bearing

Schaeffler ID:
0191542240000Spindle bearing B719...-E-2RSD, adjusted,
in pairs or sets, contact angle $\alpha = 25^\circ$, lip
seals on both sides, non-contact, restricted
tolerances

Technical information

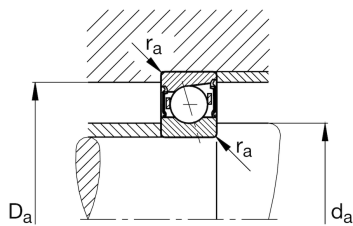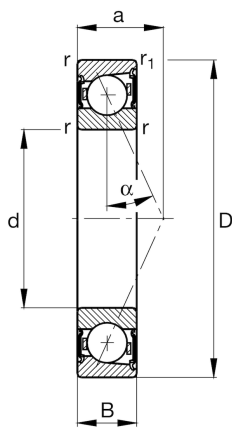

Main Dimensions & Performance Data

d	65 mm	Bore diameter
D	90 mm	Outside diameter
B	13 mm	Width
C_r	23.700 N	Basic dynamic load rating, radial
C_{0r}	16.000 N	Basic static load rating, radial
C_{ur}	1.690 N	Fatigue load limit, radial
$n_{G \text{ Grease}}$	13.000 1/min	Limiting speed for grease lubrication
$\approx m$	199,41 g	Weight

Mounting dimensions


d_a	70 mm	Diameter shaft shoulder
d_a	h12	Diameter shaft shoulder clearance
D_a	85,5 mm	Shoulder diameter outer ring
D_a	H12	Shoulder diameter outer ring clearance
$r_{a \text{ max}}$	0,6 mm	Maximum recess radius
$r_{a1 \text{ max}}$	0,3 mm	Maximum recess radius
a	24,6 mm	Distance between the apexes of the pressure cones

Dimensions

r_{min}	1 mm	Minimum chamfer dimension
$r_{1 \text{ min}}$	1 mm	Minimum chamfer dimension
α	25 °	Contact angle

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	80 °C	Operating temperature max.

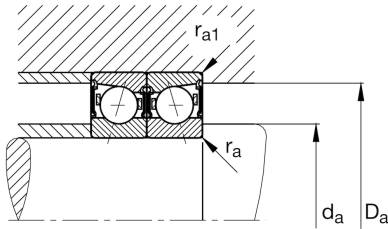

Additional information

F_{VL}	152 N	Preload force light
F_{VM}	613 N	Preload force medium
F_{VH}	1.339 N	Preload force heavy
K_{aEL}	440 N	Lift-off force light
K_{aEM}	1.837 N	Lift-off force medium
K_{aEH}	4.145 N	Lift-off force heavy
c_{aL}	126 N/ μ m	Axial rigidity light
c_{aM}	213 N/ μ m	Axial rigidity medium
c_{aH}	293 N/ μ m	Axial rigidity heavy