


Double row axial angular contact ball bearings with flange

For screw mounting

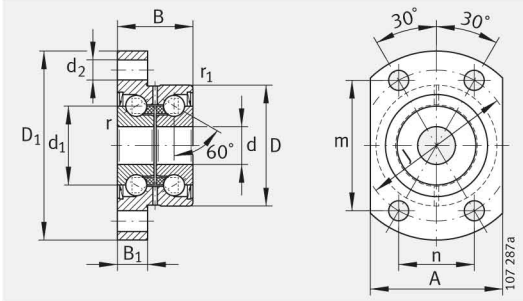

ZKLFA...2RS, ZKLFA...2Z

Dimension table · Dimensions in mm

Designation	Mass	Dimensions														Mounting dimensions	
	m	d	D	B	d ₁	D ₁	r	r ₁	B ₁	d ₂	m	J	n	A	d _a		
		≈kg	−0,005	−0,01	−0,25			min.	min.								
ZKLFA0630-2Z	0,05	6	19	12	12	30	0,3	0,3	5	3,5	21	24	12	22	9	15	
ZKLFA0640-2RS	0,08	6	24	15	14	40	0,3	0,6	6	4,5	27,5	32	16	27	9	18	
ZKLFA0640-2Z	0,08	6	24	15	14	40	0,3	0,6	6	4,5	27,5	32	16	27	9	18	
ZKLFA0850-2RS	0,17	8	32	20	19	50	0,3	0,6	8	5,5	34,5	40	20	35	11	25	
ZKLFA0850-2Z	0,17	8	32	20	19	50	0,3	0,6	8	5,5	34,5	40	20	35	11	25	
ZKLFA1050-2RS	0,18	10	32	20	21	50	0,3	0,6	8	5,5	34,5	40	20	35	14	27	
ZKLFA1050-2Z	0,18	10	32	20	21	50	0,3	0,6	8	5,5	34,5	40	20	35	14	27	
ZKLFA1263-2RS	0,3	12	42	25	25	63	0,3	0,6	10	6,8	46	53	26,5	45	16	31	
ZKLFA1263-2Z	0,3	12	42	25	25	63	0,3	0,6	10	6,8	46	53	26,5	45	16	31	
ZKLFA1563-2RS	0,31	15	42	25	28	63	0,3	0,6	10	6,8	46	53	26,5	45	20	34	
ZKLFA1563-2Z	0,31	15	42	25	28	63	0,3	0,6	10	6,8	46	53	26,5	45	20	34	

- 1) Tightening torque for the fixing screws as recommended by the manufacturer.
Screws must be ordered separately.
- 2) Mass moment of inertia for rotating inner ring.
- 3) Only valid in conjunction with INA precision locknuts.

