
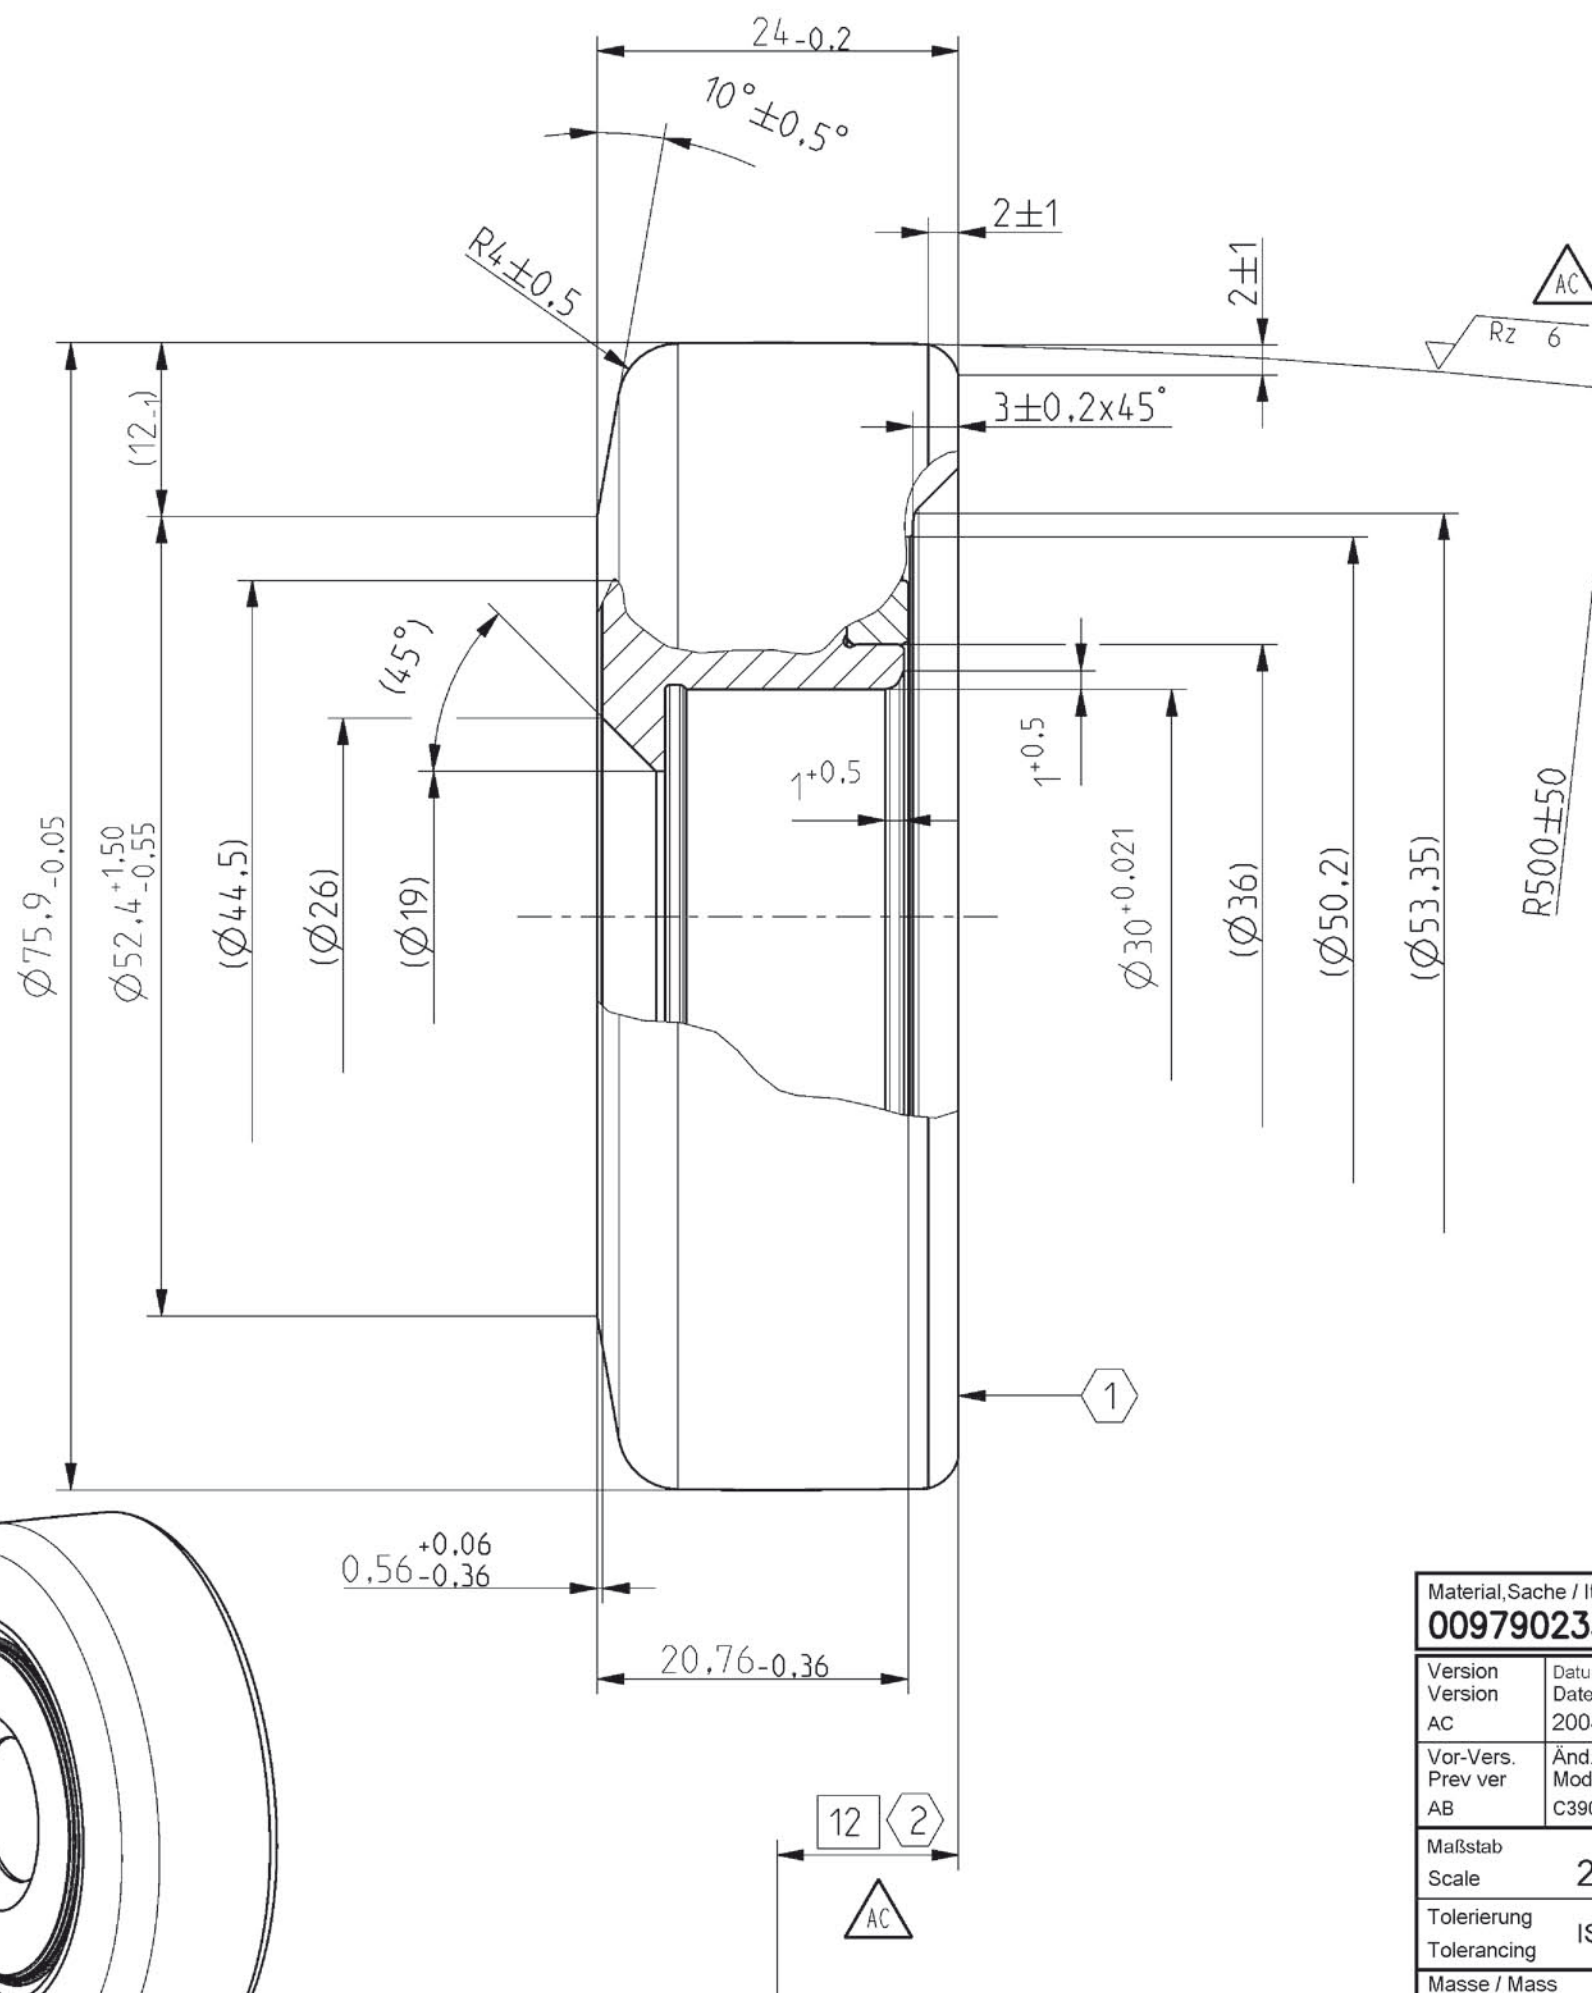


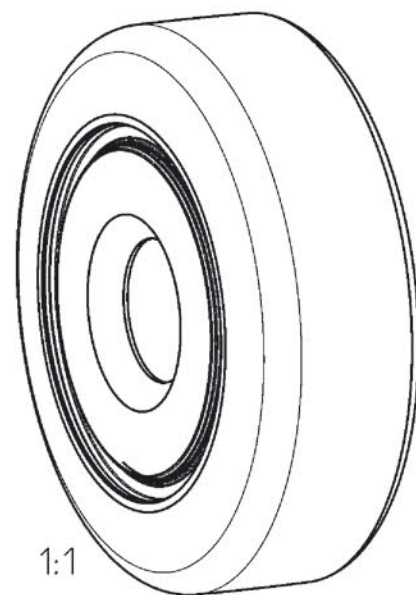

Tragzahlen als Stützrolle	
C_w	= 43000 N
C_{0w}	= 52000 N
$F_{r\ per}$	= 25500 N
$F_{0r\ per}$	= 52000 N

Basic load ratings as yoke type track roller	
C_w	= 43000 N
C_{0w}	= 52000 N
$F_{r \text{ per}}$	= 25500 N
$F_{0r \text{ per}}$	= 52000 N

Axialspiel 0,34 max.

Axial clearance 0.34 max.

Radialluft
0,012 bis 0,052

Radial internal clearance
0.012 to 0.052

befettet mit Schmierfett
nach GreaseSpec. 0008

lubricated with grease
acc. to GreaseSpec. 0008

① = gekennzeichnet mit
F-230153
605 298

① = marked with
F-230153
605 298

 = Einstichpunkt R500

 = Center point R500

Genehmigungsvermerk	
Firma	_____
Abteilung	_____
Name	_____
Datum	_____

Signed for approval	
company	_____
dept.	_____
name	_____
date	_____

Material, Sache / Item 009790233-0000		Ref.-Nr.	Bezeichnung / Designation F-230153.HUTR	30,000 x 75,900 x 24,000	
Version Version AC	Datum Date 2008-09-12	Änderungsbeschreibung / Modification description Hinzu: Eistichpkt R500; Rz6;		 © 2008 Schaeffler KG	
Vor-Vers. Prev ver AB	Änd.-Nr. Modif. No. C3907				
Maßstab Scale 2:1		Benennung / Description Hubmastrolle Lift Mast Roller		Zeichner / Prep. by R.Preuß	
Tolerierung Tolerancing ISO 8015				Prüfer / Chkd by L.Labelle	
Masse / Mass 0,6 kg		Kunden-Z.-Nr. / Cust. Drg. No.	Labor/Büro / Lab./office A67 IEAHZA-AM	Freigeber / Appr. by J.Klueppel	
Blatt Sheet 1 / 1	Format Size A3	Angebots- und Lieferzeichnung Customer delivery drawing	Dokument / Document EDD F-230153 000		