

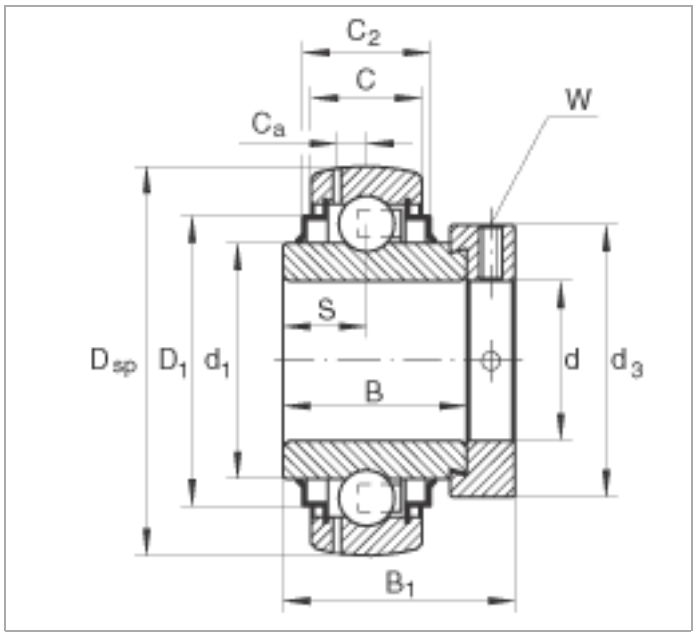
Radial insert ball bearings

GE120-KRR-B (Series GE..-KRR-B)

spherical outer ring, location by eccentric locking collar, R seals on both sides

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	120	mm	
D_{SF}	215	mm	
B_1	81	mm	
B	63,5	mm	
C	40	mm	
C_2	45	mm	
C_a	12,8	mm	
D_1	186,5	mm	
d_1	146,4	mm	
$d_{3\,max}$	152	mm	
S	28,5	mm	
W	6	mm	
m	7,49	kg	Mass
C_r	165000	N	Basic dynamic load rating, radial
C_{0r}	131000	N	Basic static load rating, radial
			Lubrication groove in outer ring
	6224		Reference bearing for determining the equivalent bearing load.


C2
C
Ca
W
S
Dsp
D1
d1
B
d
d3
B1