

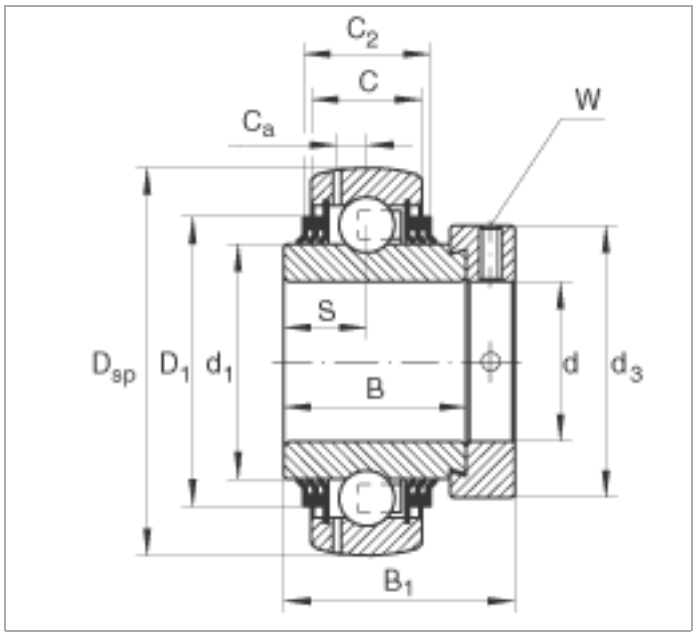
Radial insert ball bearings

GE25-KTT-B (Series GE..-KTT-B)

spherical outer ring, location by eccentric locking collar, T seals on both sides

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	25	mm	
D_{SF}	52	mm	
B_1	44,5	mm	
B	34,9	mm	
C	15	mm	
C_2	20,2	mm	
C_a	3,9	mm	
D_1	42,5	mm	
d_1	33,8	mm	
$d_{3\,max}$	37,5	mm	
S	17,5	mm	
W	3	mm	
m	0,24	kg	Mass
C_r	14900	N	Basic dynamic load rating, radial
C_{0r}	7800	N	Basic static load rating, radial
	6205		Reference bearing for determining the equivalent bearing load.


C2
C
Ca
W
S
Dsp
D1
d1
B
d
d3
B1