

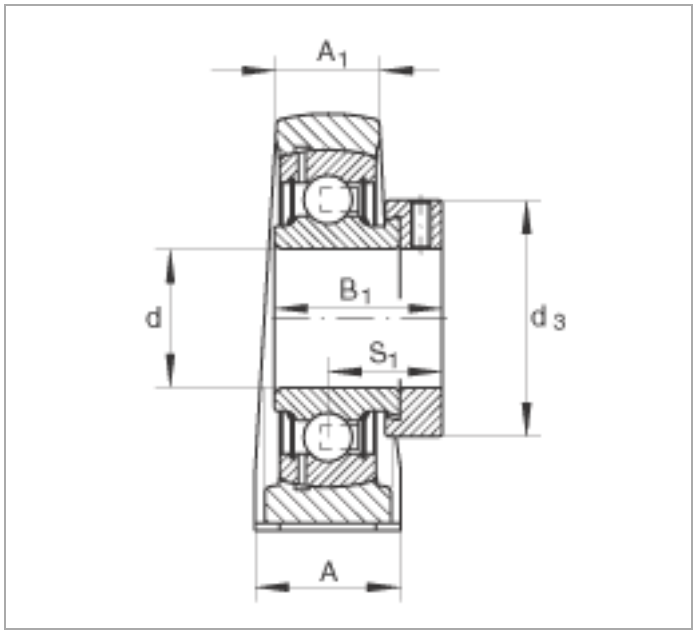
Plummer block housing units

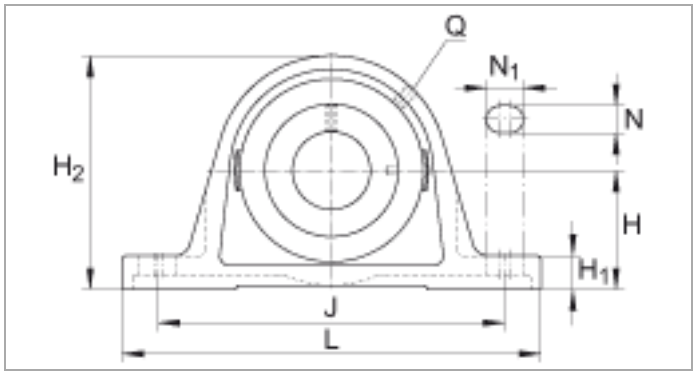
PASE35-N (Series PASE)

cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	35 mm	
L	163 mm	
H_2	93 mm	
A	45 mm	
A_1	27 mm	
B_1	39 mm	
d_3 max	55 mm	
H	47,6 mm	
H_1	19 mm	
J	126 mm	
N	14 mm	
N_1	21 mm	
Q	Rp1/8	
S_1	29,5 mm	
m	1,57 kg	Mass
C_r	27500 N	Basic dynamic load rating, radial
C_{0r}	15300 N	Basic static load rating, radial
	GG.ASE07-N	Designation of housing
	GRAE35-NPP-B	Designation of bearing
	KASK07	Bearing end cap, closed design. To be ordered separately.
		Slot for bearing end cap


A1
B1
d
S1
d3
A


Q
N1
N
H2
H
H1
J
L