

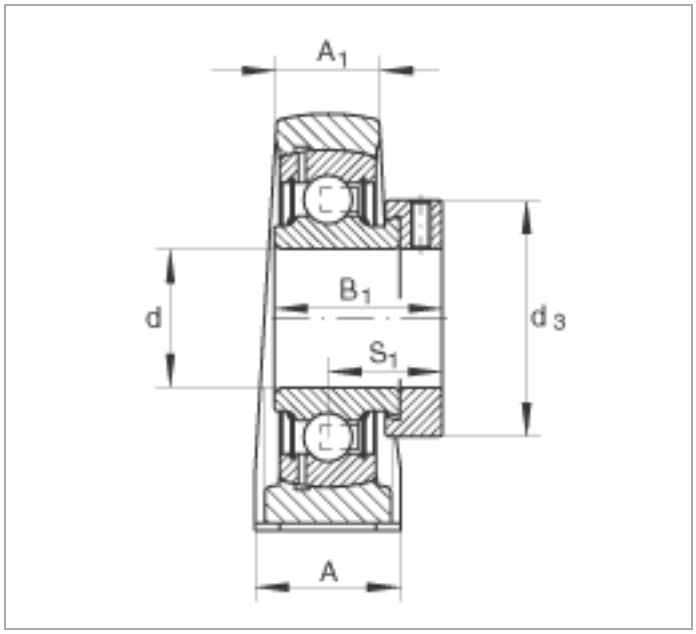
Plummer block housing units

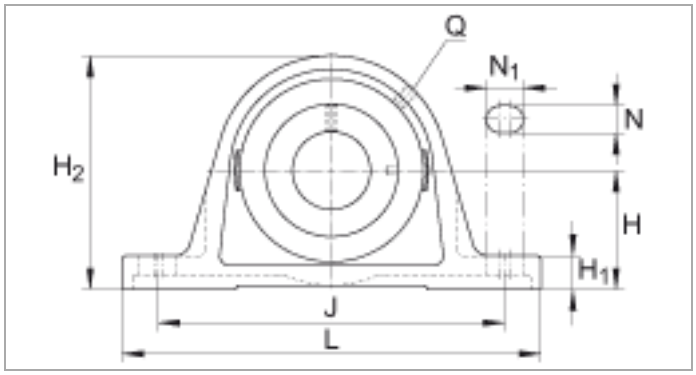
PASE40-N (Series PASE)

cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	40	mm	
L	179	mm	
H_2	99	mm	
A	48	mm	
A_1	30	mm	
B_1	43,8	mm	
d_3 max	58	mm	
H	49,2	mm	
H_1	19	mm	
J	138	mm	
N	14	mm	
N_1	26	mm	
Q	Rp1/8		
S_1	32,7	mm	
m	1,84	kg	Mass
C_r	34500	N	Basic dynamic load rating, radial
C_{0r}	19800	N	Basic static load rating, radial
	GG.ASE/AK08-N		Designation of housing
	GRAE40-NPP-B		Designation of bearing
	KASK08		Bearing end cap, closed design. To be ordered separately.
			Slot for bearing end cap


A1
d
B1
S1
d3
A


Q
N1
N
H2
H
H1
J
L