

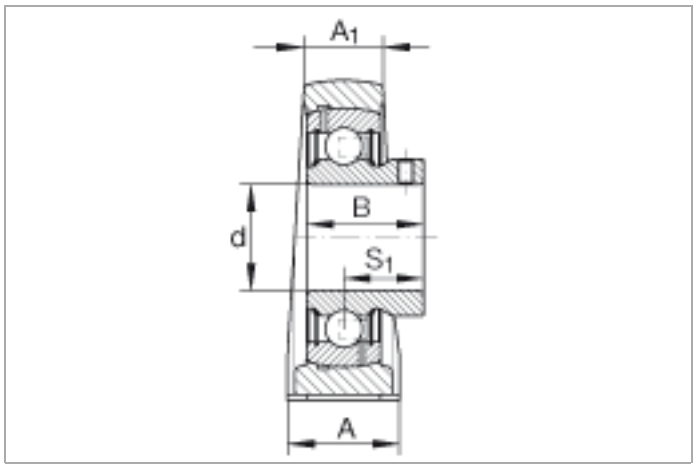
Plummer block housing units

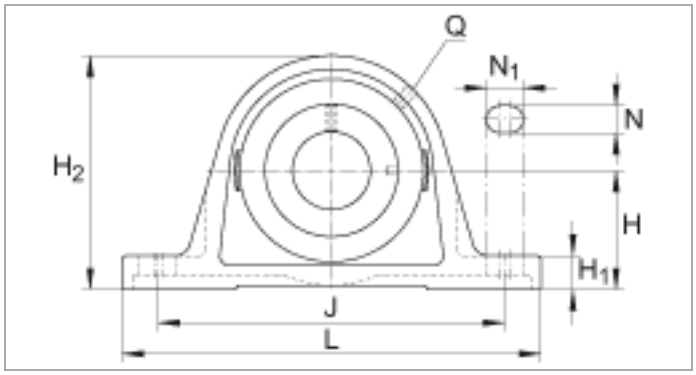
PASEY50-N (Series PASEY)

cast iron housing, radial insert ball bearing with grub screws in inner ring, P seals

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	50	mm	
L	200	mm	
H_2	115	mm	
A	54	mm	
A_1	34	mm	
B	43	mm	
H	57,2	mm	
H_1	21,5	mm	
J	158	mm	
N	18	mm	
N_1	23	mm	
Q	Rp1/8		
S_1	32	mm	
m	2,49	kg	Mass
C_r	37500	N	Basic dynamic load rating, radial
C_{0r}	23200	N	Basic static load rating, radial
	GG.ASE10-N		Designation of housing
	GAY50-NPP-B		Designation of bearing
	KASK10		Bearing end cap, closed design. To be ordered separately.
			Slot for bearing end cap


A1
B
d
S1
A


Q
N1
N
H2
H
H1
J
L