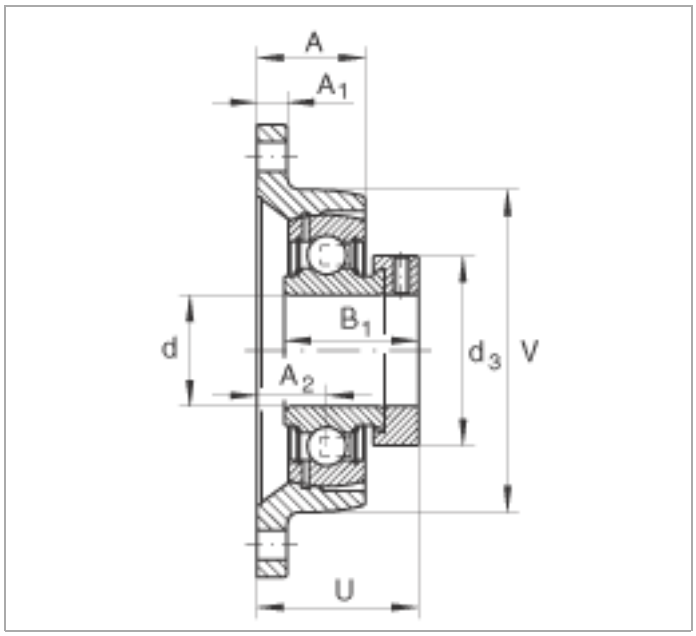



Housing units PCFT15 (Series PCFT)

two-bolt flanged housing units, cast iron, eccentric locking collar, P seals

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	15	mm	
H	99	mm	
U	32,1	mm	
A	18	mm	
A_1	9,5	mm	
A_2	10	mm	
B_1	28,6	mm	
d_3 max	28	mm	
J	76,5	mm	
L	57	mm	
N	11,5	mm	
Q	M6		
V	57	mm	
m	0,39	kg	Mass
C_r	10100	N	Basic dynamic load rating, radial
C_{0r}	4750	N	Basic static load rating, radial
	GG.CFT03		Designation of housing
	GRAE15-NPP-B		Designation of bearing


A
A1
d
B1
A2
d3
V
U

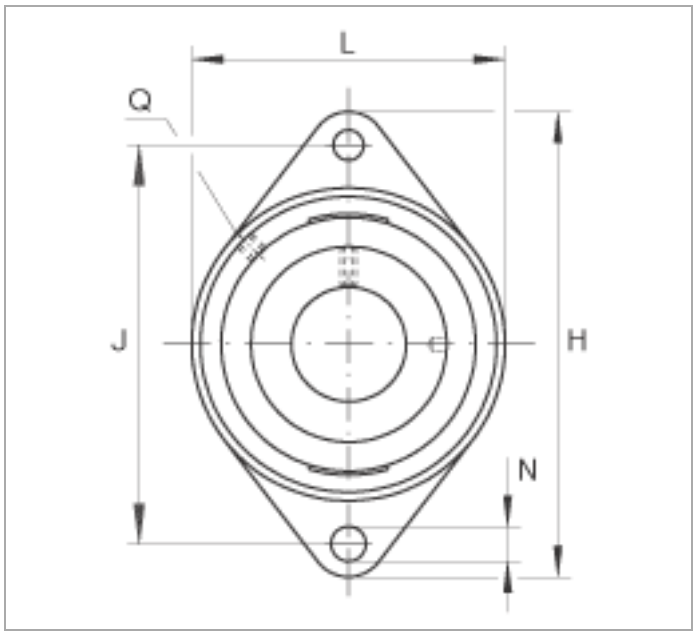
L
Q
J
H
N