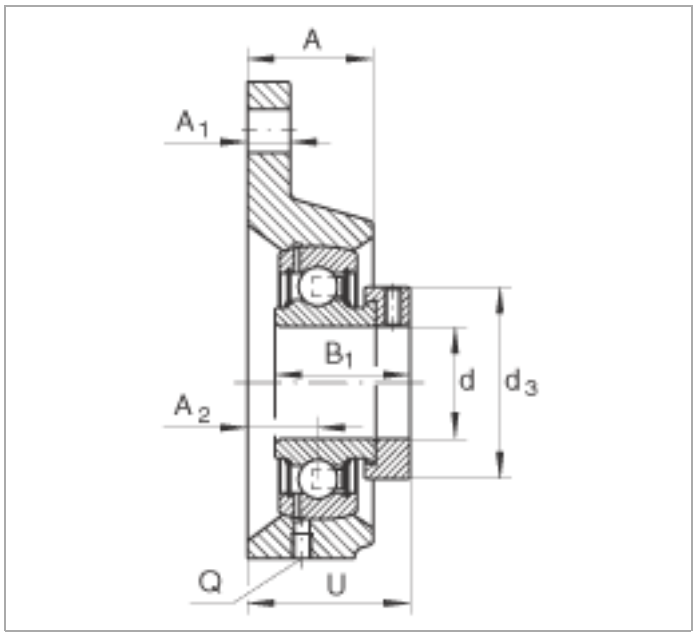



Housing units PCFTR45 (Series PCFTR)

three-bolt flanged housing units, cast iron, eccentric locking collar, P seals

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	45	mm	
H_2	150	mm	
U	51,9	mm	
A	33	mm	
A_1	16	mm	
A_2	19,2	mm	
B_1	43,8	mm	
d_3 max	63	mm	
H_1	55	mm	
J	160	mm	
N	14	mm	
Q	Rp1/8		
m	2	kg	Mass
C_r	34500	N	Basic dynamic load rating, radial
C_{0r}	20400	N	Basic static load rating, radial
	GG.CFTR09		Designation of housing
	GRAE45-NPP-B		Designation of bearing


A
A1
B1
d
d3
A2
Q
U

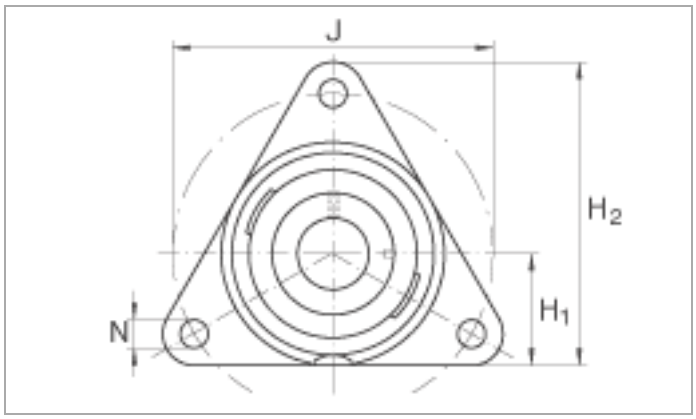
J
H2
H1
N