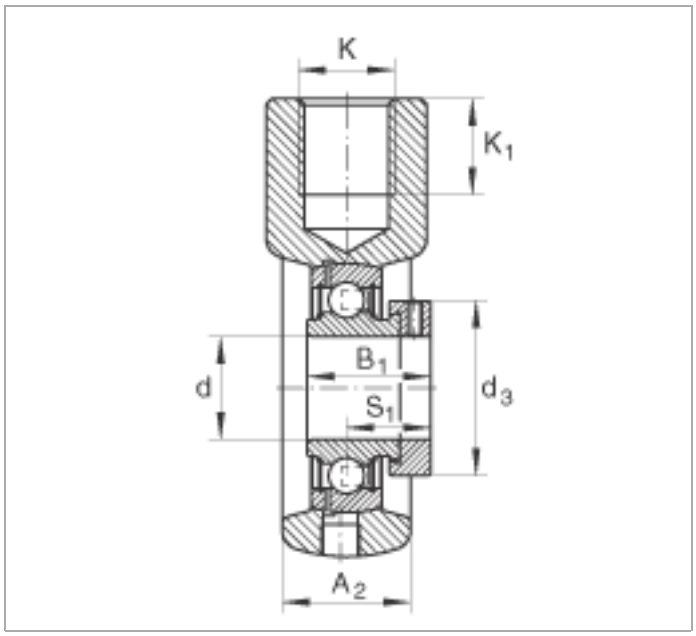



Take-up housing units PHE20 (Series PHE)

cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	20	mm	
L	91	mm	
M	65	mm	
A_2	25	mm	
B_1	31	mm	
d_3 max	33	mm	
K	M16		
K_1	21	mm	
L_1	58	mm	
Q	Rp1/8		
S_1	23,5	mm	
T	30	mm	
W	38	mm	
m	0,54	kg	Mass
C_r	13600	N	Basic dynamic load rating, radial
C_{0r}	6600	N	Basic static load rating, radial
	GG.HE04		Designation of housing
	GRAE20-NPP-B		Designation of bearing


K
K1
B1
d
S1
d3
A2

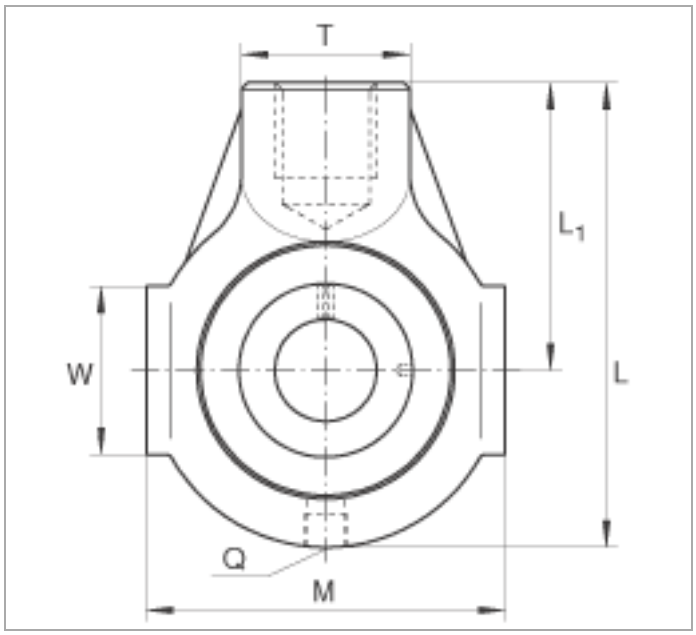
T
L1
W
L
Q
M