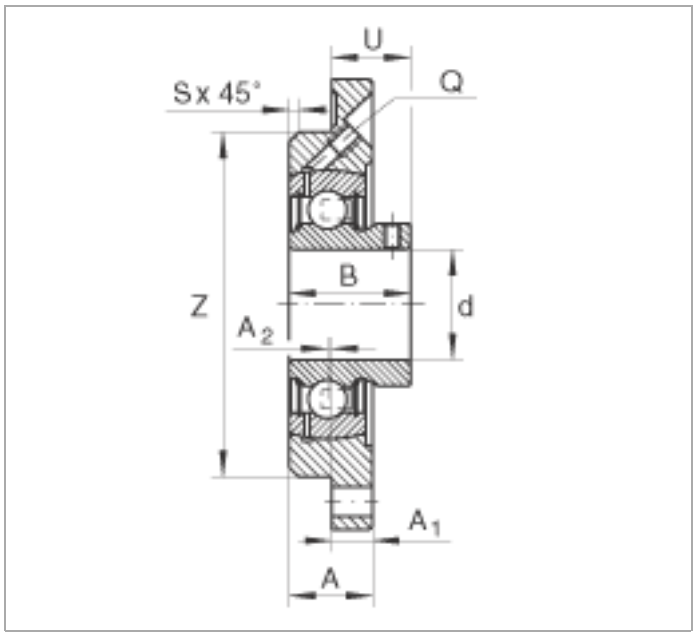
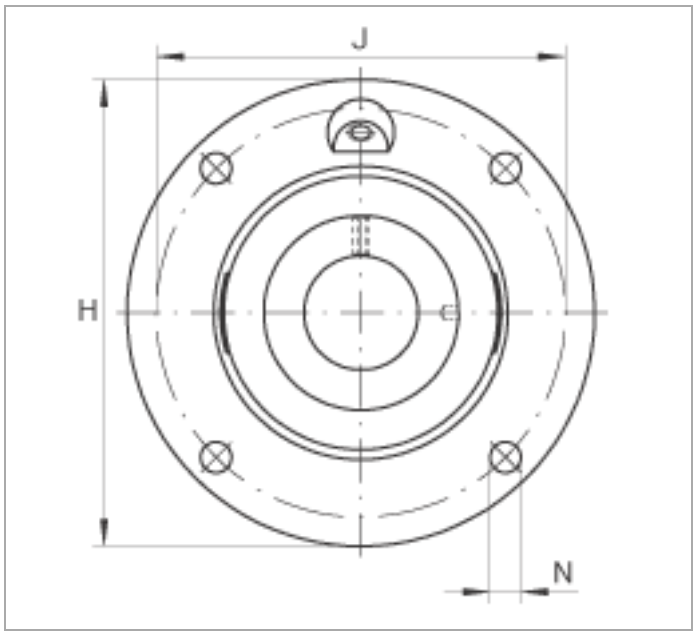
Housing units PMEY40-N (Series PMEY)

four-bolt flanged housing units, cast iron, centring spigot, grub screws in inner ring, P seals

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	40	mm	
H	145	mm	
B	39,5	mm	
A	23	mm	
A_1	11,5	mm	
A_2	1	mm	
J	120	mm	
N	11,5	mm	
Q	M6		
S	2	mm	
U	28	mm	
Z	100	mm	Tolerance: h8
m	1,51	kg	Mass
C_r	34500	N	Basic dynamic load rating, radial
C_{0r}	19800	N	Basic static load rating, radial
	GG.ME08-N		Designation of housing
	GAY40-NPP-B		Designation of bearing
	KASK08		Bearing end cap, closed design. To be ordered separately.
			Slot for bearing end cap


U
Q
S x 45°
Z
B
d
A2
A1
A


J
H
N