

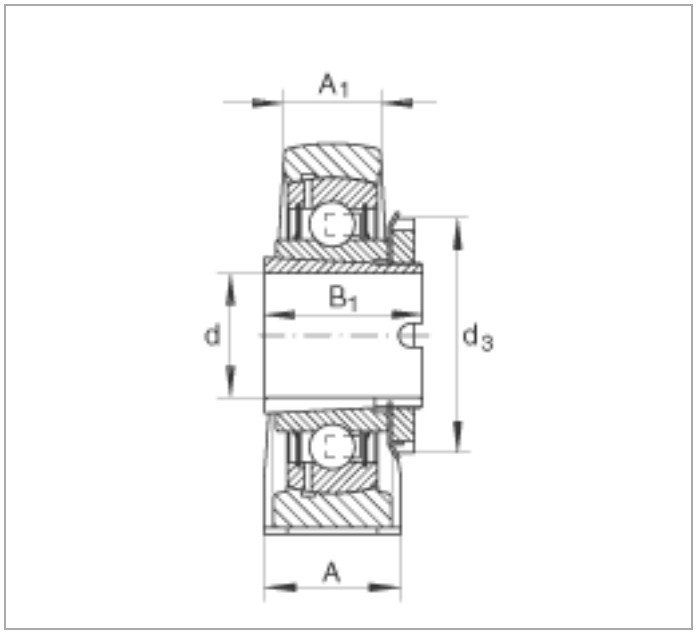
Plummer block housing units

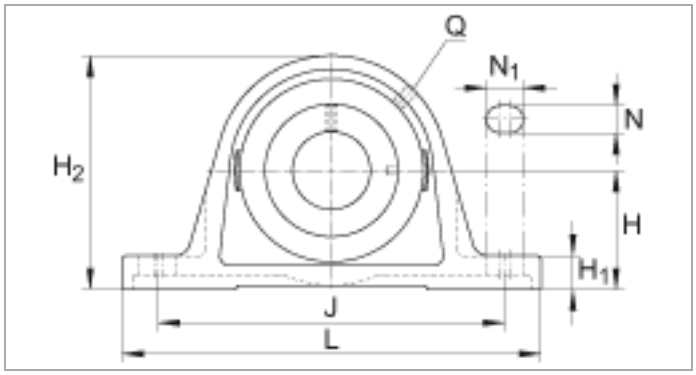
RASEA50-N (Series RASEA)

cast iron housing, radial insert ball bearing with adapter sleeve, R seals

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	50 mm	
L	200 mm	
H_2	115 mm	
A	54 mm	
A_1	34 mm	
B_1	40 mm	
d_3 max	70 mm	
H	57,2 mm	
H_1	21,5 mm	
J	158 mm	
N	18 mm	
N_1	23 mm	
Q	Rp1/8	
m	2,09 kg	Mass
C_r	35000 N	Basic dynamic load rating, radial
C_{0r}	23100 N	Basic static load rating, radial
	GG.ASE10-N	Designation of housing
	GSH50-2RSR-B	Designation of bearing
	KASK10	Bearing end cap, closed design. To be ordered separately.
		Slot for bearing end cap


A1
B1
d
d3
A


Q
N1
N
H2
H
H1
J
L