

Housing units RCSMF25 (Series RCSMF)

two-bolt flanged housing units, sheet steel, rubber interliner, eccentric locking collar, P seals

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	25	mm	
H	114	mm	
U	36,2	mm	
A	27	mm	
A_2	12,7	mm	
B_1	31	mm	
$d_{3\,max}$	37,5	mm	
J	92	mm	
L	70	mm	
N	10,5	mm	
S	1,5	mm	
V	68	mm	
m	0,33	kg	Mass
C_g	1400	N	Load carrying capacity of housing, radial
C_r	14900	N	Basic dynamic load rating, radial
C_{0r}	7800	N	Basic static load rating, radial
	FLAN65-RCSMF-FA125		Designation of housing Housing with Corrotect® coating.
	RAE25-NPP-FA106		Designation of bearing
	GRG.RCSM52/65		Designation of rubber interliner

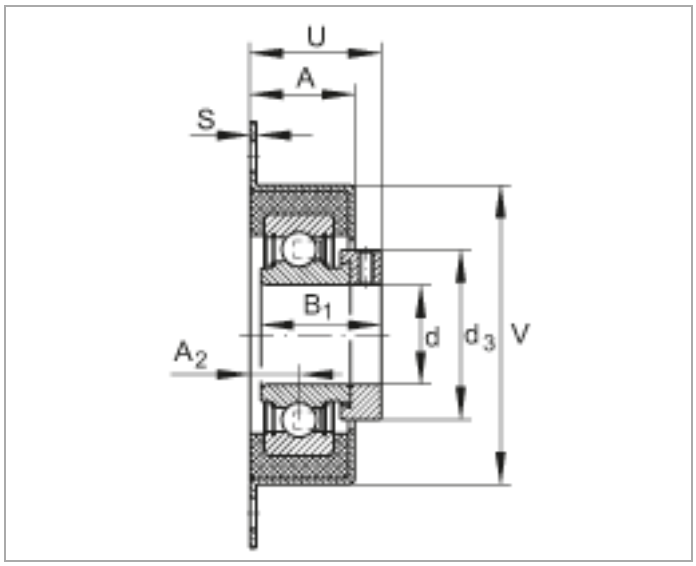
U
A
S
B1
A2
d
d3
V

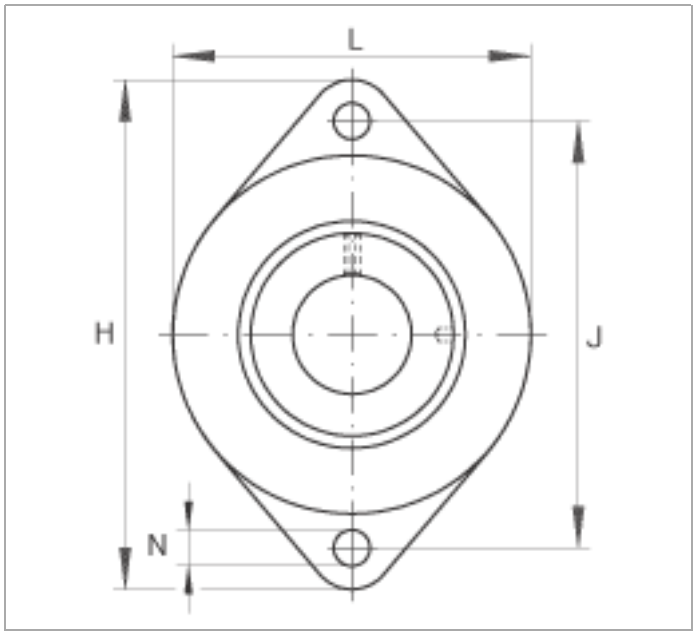
L
H
J
N