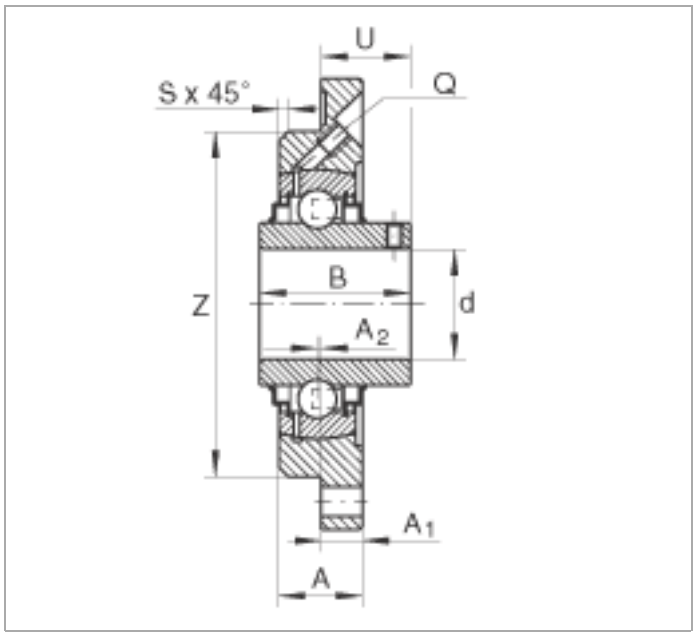



Housing units RMEY55 (Series RMEY)

four-bolt flanged housing units, cast iron, centring spigot, grub screws in inner ring, R seals

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	55	mm	
H	185	mm	
B	55,6	mm	
A	27,5	mm	
A_1	15	mm	
A_2	-	mm	
J	150	mm	
N	18	mm	
Q	M6		
S	3	mm	
U	33,4	mm	
Z	125	mm	Tolerance: h8
m	3,05	kg	Mass
C_r	46000	N	Basic dynamic load rating, radial
C_{0r}	29000	N	Basic static load rating, radial
	GG.ME11		Designation of housing
	GYE55-KRR-B		Designation of bearing


U
S x 45°
Q
Z
B
d
A2
A1
A

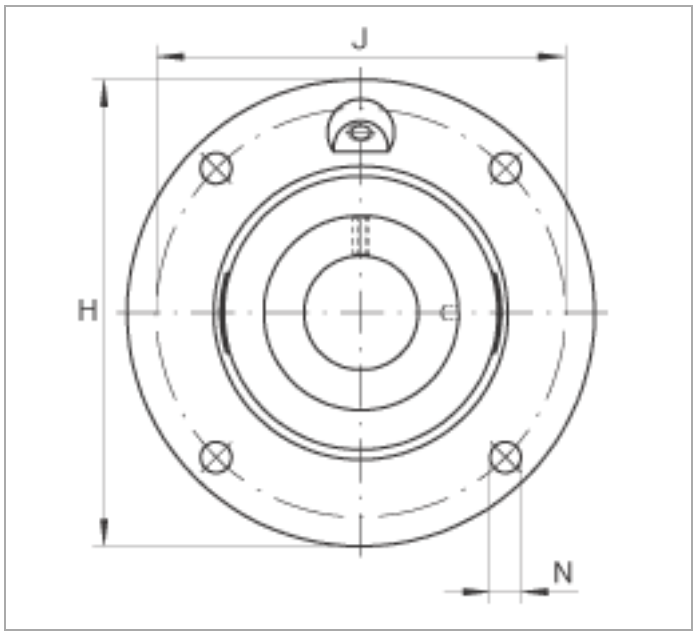
J
H
N