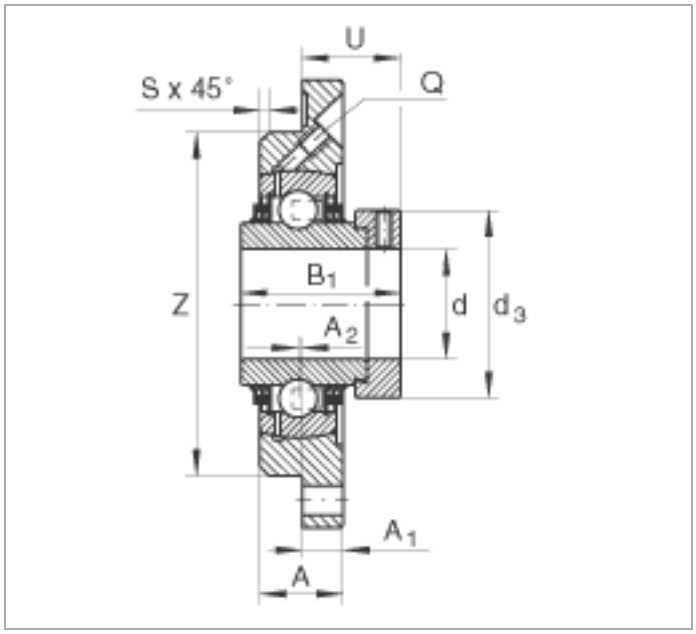



Housing units TME35-N (Series TME)

four-bolt flanged housing units, cast iron, centring spigot, eccentric locking collar, T seals

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	35	mm	
H	135	mm	
B_1	51,3	mm	
A	20,5	mm	
A_1	10	mm	
A_2	1	mm	
d_3 max	51	mm	
J	110	mm	
N	11,5	mm	
Q	M6		
S	2	mm	
U	31,3	mm	
Z	90	mm	Tolerance: h8
m	1,35	kg	Mass
C_r	27500	N	Basic dynamic load rating, radial
C_{0r}	15300	N	Basic static load rating, radial
	GG.ME07-N		Designation of housing
	GE35-KTT-B		Designation of bearing
	KASK07		Bearing end cap, closed design. To be ordered separately.
			Slot for bearing end cap


U
S x 45°
Q
Z
B1
A2
d
d3
A1
A

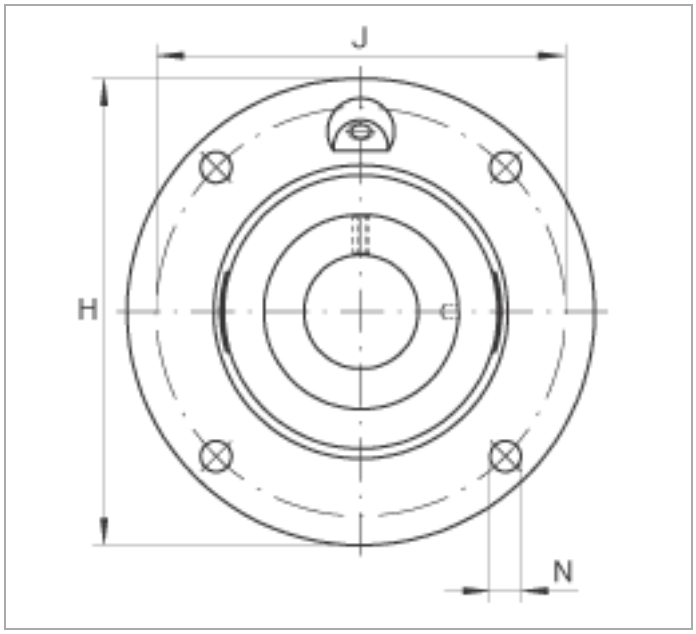
J
H
N