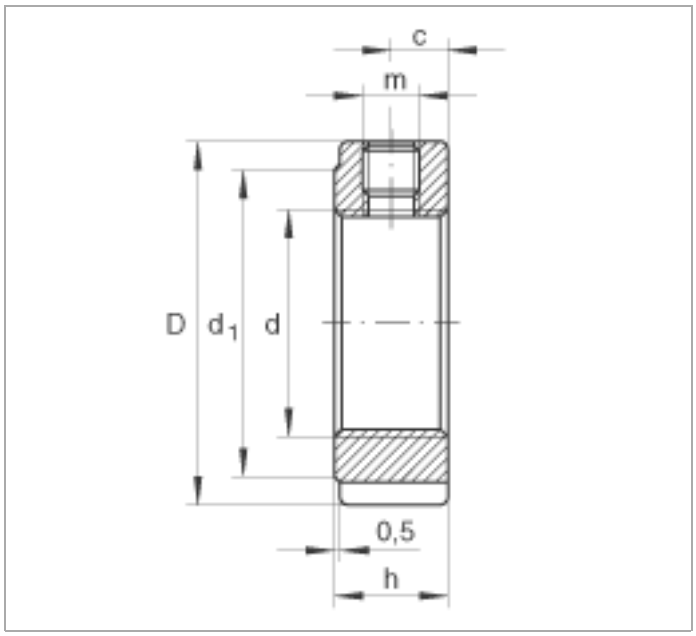



Precision locknuts ZM35 (Series ZM)

locking pegs, radially arranged

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	M35X1,5		
D	52	mm	
h	12	mm	
b	5	mm	
c	6	mm	
d_1	47	mm	
m	M6		Grub screw thread
t	2	mm	
m	0,099	kg	Mass
M_m	5	Nm	Tightening torque of grub screw
F_{aB}	134000	N	Ultimate axial load
M_L	80	Nm	Breakaway torque
M_{AL}	40	Nm	Reference tightening torque for breakaway torque
M_M	0,537	kg x cm^2	Mass moment of inertia


c
m
D
d1
d
0,5
h

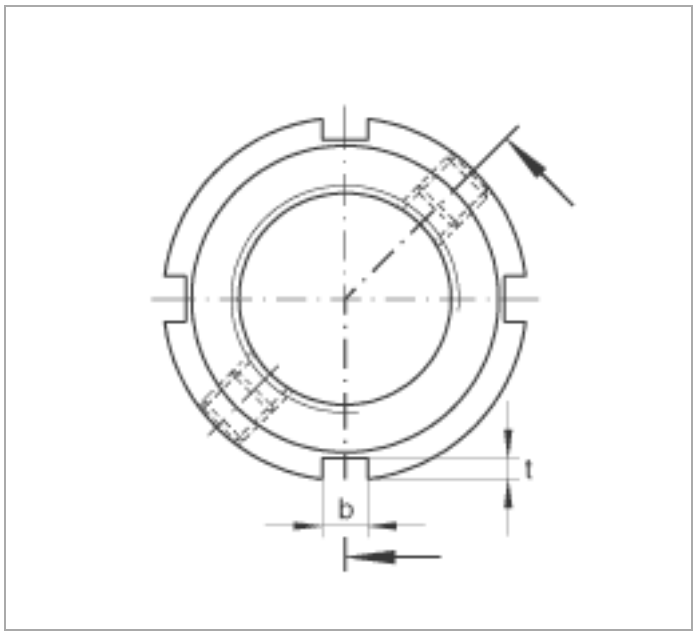
t
b