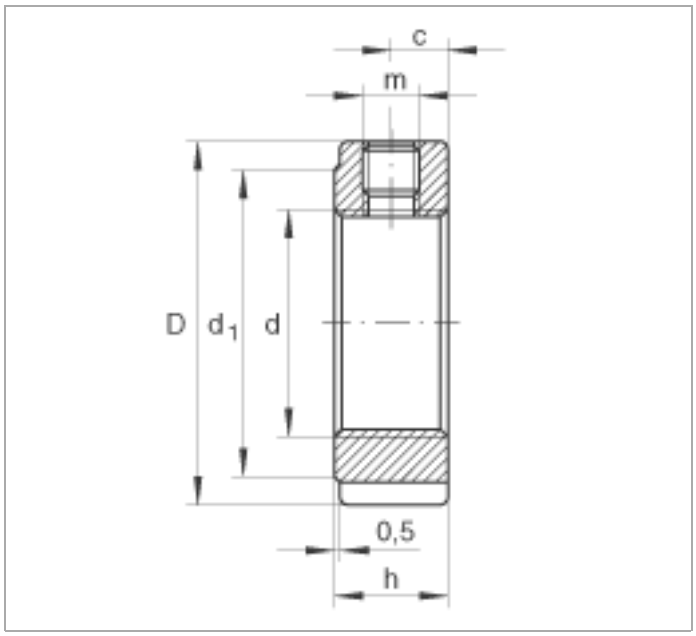



Precision locknuts ZM85 (Series ZM)

locking pegs, radially arranged

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	M85X2	
D	110 mm	
h	18 mm	
b	8 mm	
c	9 mm	
d_1	102 mm	
m	M8	Grub screw thread
t	3,5 mm	
m	0,49 kg	Mass
M_m	15 Nm	Tightening torque of grub screw
F_{aB}	385000 N	Ultimate axial load
M_L	320 Nm	Breakaway torque
M_{AL}	190 Nm	Reference tightening torque for breakaway torque
M_M	13,1 kg x cm^2	Mass moment of inertia


c
m
D
d_1
d
0,5
h

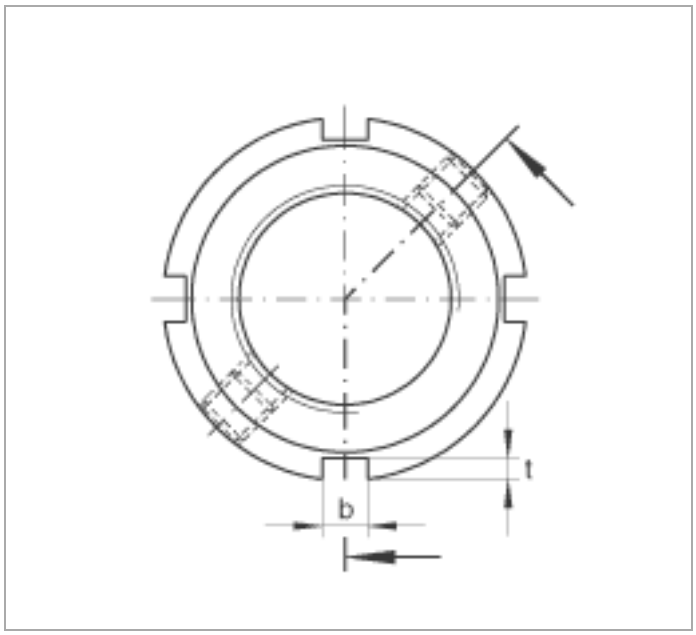
t
b