


KETTINGWIELEN - SIMPLEX

Voor rollenketting 04B-1

Vlgs. Din 8187

6,0 x 2,8 mm

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg
8	5	6	9,8	10	15,67	18,00	0,01
9	5	7	11,5	10	17,54	19,90	0,01
10	6	8	13	10	19,42	21,70	0,01
11	6	9	14	10	21,30	23,60	0,01
12	6	10	16	10	23,18	25,40	0,02
13	6	12	18	10	25,05	27,30	0,02
14	6	10	20	10	26,96	29,20	0,03
15	6	13	20	10	28,86	31,10	0,03
16	8	13	20	13	30,76	33,00	0,04
17	8	13	20	13	32,65	35,00	0,04
18	8	13	20	13	34,55	36,90	0,05
19	8	13	20	13	36,44	38,80	0,05
20	8	13	20	13	38,34	40,70	0,06
21	8	16	25	13	40,25	42,60	0,06
22	8	16	25	13	42,16	44,50	0,06
23	8	16	25	13	44,06	46,40	0,06
24	8	16	25	13	45,96	48,30	0,06
25	8	16	25	13	47,87	50,20	0,07
26	8	19	30	15	49,77	52,10	0,09
27	8	19	30	15	51,67	54,00	0,09
28	8	19	30	15	53,58	55,90	0,09
29	8	19	30	15	55,50	57,80	0,10
30	8	19	30	15	57,42	59,80	0,10
31	10	19	30	15	59,31	61,70	0,10
32	10	19	30	15	61,21	63,60	0,10
33	10	19	30	15	63,11	65,50	0,11
34	10	19	30	15	65,02	67,40	0,12
35	10	19	30	15	66,93	69,30	0,13
36	10	19	30	15	68,84	71,20	0,14
37	10	19	30	15	70,75	73,10	0,15
38	10	19	30	15	72,66	75,00	0,17
39	10	19	30	15	74,56	76,90	0,18
40	10	19	30	15	76,47	78,90	0,19
45	12	25	40	18	86,01	88,50	0,50
50	12	34	50	20	95,55	98,00	0,56
57	12	34	50	20	108,93	111,40	0,60

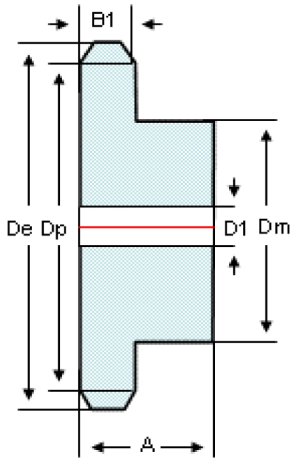

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	6,0 mm
Binnenbreedte	E	=	2,8 mm
Roldiameter	D3	=	4,0 mm
Tandbreedte	B1	=	2,6 mm

materiaal: staal C45