


KETTINGWIELEN - DUPLEX

Voor rollenketting 05B-2 Vlg. Din 8187 8,0 x 3,0 mm

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg
8	6	8	12	18	20,90	23,40	0,02
9	6	9	15	18	23,39	25,90	0,02
10	8	11	17	18	25,89	28,40	0,03
11	8	12	19	18	28,39	31,00	0,04
12	8	13	21	18	30,91	33,70	0,04
13	8	15	24	18	33,42	36,70	0,06
14	8	16	26	18	35,95	39,20	0,06
15	8	18	29	18	38,48	41,70	0,08
16	10	19	32	20	41,01	44,20	0,09
17	10	19	34	20	43,53	46,70	0,10
18	10	19	37	20	46,07	49,20	0,11
19	10	19	39	20	48,61	51,70	0,11
20	10	19	40	20	51,14	54,20	0,12
21	10	23	40	20	53,67	57,20	0,13
22	10	23	40	20	56,21	59,40	0,15
23	10	23	40	20	58,75	62,20	0,16
24	10	23	40	20	61,29	64,70	0,16
25	10	23	40	20	63,83	67,20	0,17
26	12	26	50	22	66,37	69,70	0,18
27	12	26	50	22	68,91	72,30	0,21
28	12	26	50	22	71,45	74,70	0,22
29	12	26	50	22	73,99	77,20	0,23
30	12	26	50	22	76,53	80,20	0,24
31	12	26	60	22	79,08	82,70	0,26
32	12	26	60	22	81,61	85,20	0,27
33	12	26	60	22	84,16	87,70	0,27
34	12	26	60	22	86,70	90,20	0,30
35	12	26	60	22	89,24	92,70	0,31
36	12	26	60	22	91,79	95,20	0,31
37	12	26	60	22	94,33	97,70	0,34
38	12	26	60	22	96,88	100,20	0,34
39	12	26	60	22	99,42	102,70	0,38
40	12	26	60	22	101,97	105,20	0,44
45	14	40	60	22	114,69	118,60	1,12
50	14	40	60	22	127,41	131,50	1,89
57	14	53	80	22	145,22	149,30	2,15

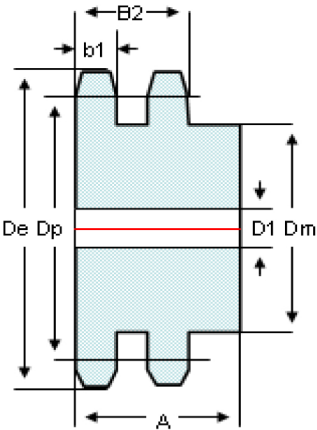

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	8,0 mm
Binnenbreedte	E	=	3,0 mm
Roldiameter	D3	=	5,0 mm
Tandbreedte	b1	=	2,7 mm
	B2	=	8,3 mm

materiaal: staal C45