


KETTINGWIELEN - TRIPLEX

Voor rollenketting 06B-3

Vlgs. Din 8187

3/8" x 7/32"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg
8	6	9	15	32	24,89	28,60	0,05
9	8	12	18	32	27,85	31,50	0,07
10	10	13	20	32	30,82	34,50	0,09
11	10	14	22	35	33,80	37,50	0,11
12	10	16	25	35	36,80	40,50	0,15
13	10	18	28	35	39,80	43,50	0,19
14	12	20	31	35	42,80	46,50	0,23
15	12	22	34	35	45,81	49,50	0,28
16	12	24	37	35	48,82	52,50	0,33
17	12	26	40	35	51,83	55,50	0,39
18	12	28	43	35	54,85	58,60	0,45
19	12	31	46	35	57,87	61,60	0,51
20	12	32	49	35	60,89	64,60	0,58
21	14	34	52	40	63,91	67,60	0,70
22	14	36	55	40	66,93	70,60	0,78
23	14	38	58	40	69,95	73,70	0,87
24	14	41	61	40	72,97	76,70	0,97
25	14	43	64	40	76,00	79,70	1,06
26	14	44	67	40	79,02	82,70	1,17
27	14	47	70	40	82,04	85,70	1,27
28	14	49	73	40	85,07	88,80	1,39
29	14	50	76	40	88,09	91,80	1,50
30	14	52	79	40	91,12	94,80	1,62
31	16	53	80	40	94,15	97,90	1,72
32	16	53	80	40	97,17	100,90	1,80
33	16	53	80	40	100,20	103,90	1,89
34	16	55	85	40	103,23	106,90	2,06
35	16	55	85	40	106,26	110,00	2,15
36	16	60	90	40	109,29	113,00	2,33
37	16	60	90	40	112,32	116,00	2,43
38	16	60	90	40	115,34	119,00	2,53
39	16	60	90	40	118,37	122,10	2,63
40	16	60	90	40	121,40	125,10	2,74
45	20	60	90	60	136,54	140,50	4,15
57	25	60	90	60	172,91	177,20	5,80
76	25	60	90	55	230,49	235,00	9,26
95	25	85	120	60	288,08	292,50	15,18
114	25	85	120	60	345,68	350,30	21,99

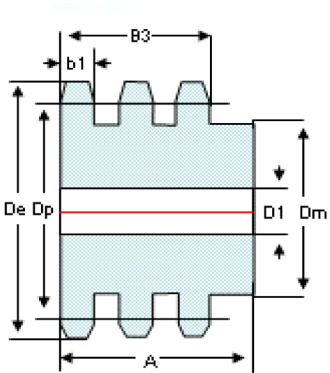

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	= 9,525 mm
Binnenbreedte	E	= 5,720 mm
Roldiameter	D3	= 6,350 mm
Tandbreedte	b1	= 5,200 mm
	B3	= 25,60 mm

materiaal: staal C45