

KETTINGWIELEN - SIMPLEX


Voor rollenketting 16B-1 Vlgs. Din 8187 1" x 17,02 mm

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht
	Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm ca. kg
8	16	27	42	35	66,37	77,90	0,47
9	16	33	50	35	74,27	85,80	0,66
10	16	36	55	35	82,19	93,80	0,83
11	16	41	61	40	90,16	101,70	1,14
12	16	46	69	40	98,14	109,70	1,43
13	16	52	78	40	106,13	117,70	1,77
14	16	55	84	40	114,15	125,70	2,08
15	16	61	92	40	122,17	133,70	2,46
16	20	66	100	45	130,20	141,80	3,14
17	20	66	100	45	138,23	149,80	3,33
18	20	66	100	45	146,27	157,80	3,56
19	20	66	100	45	154,32	165,90	3,78
20	20	66	100	45	162,37	173,90	4,03
21	20	73	110	50	170,42	182,00	5,01
22	20	73	110	50	178,48	190,10	5,28
23	20	73	110	50	186,53	198,10	5,56
24	20	73	110	50	194,60	206,20	5,86
25	20	73	110	50	202,66	214,20	6,16
26	20	80	120	50	210,72	222,30	6,96
27	20	80	120	50	218,79	230,40	7,30
28	20	80	120	50	226,86	238,40	7,64
29	20	80	120	50	234,92	246,50	8,00
30	20	80	120	50	243,00	254,60	8,38
31	25	80	120	50	251,07	262,60	8,69
32	25	80	120	50	259,14	270,70	9,09
33	25	80	120	50	267,21	278,80	9,50
34	25	80	120	50	275,28	286,90	9,93
35	25	80	120	50	283,36	294,90	10,36
36	25	80	120	50	291,43	303,00	10,81
37	25	80	120	50	299,51	311,10	11,28
38	25	80	120	50	307,58	319,20	11,76
39	25	80	120	50	315,66	327,20	12,25
40	25	80	120	50	323,73	335,30	12,75
42	25	84	125	70	339,89	353,70	16,54
45	25	84	125	70	364,12	377,90	18,15
46	25	84	125	70	372,20	386,00	18,69

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	25,40 mm
Binnenbreedte	E	=	17,02 mm
Roldiameter	D3	=	15,875 mm
Tandbreedte	B1	=	16,20 mm

materiaal: staal C45

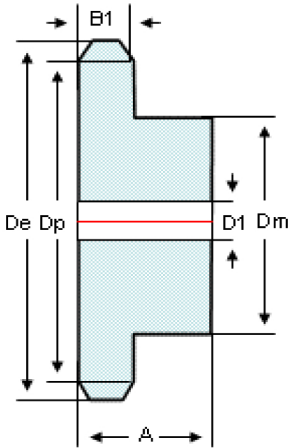


KETTINGWIELEN - SIMPLEX

Voor rollenketting 16B-1

Vlgs. Din 8187

1" x 17,02 mm

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht	Artikel code
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg	
48	25	84	125	70	388,36	402,10	19,86	K16B-1 48T-H
50	25	84	125	70	404,52	418,30	20,89	K16B-1 50T-H
51	30	84	125	70	412,60	426,40	21,45	K16B-1 51T-H
52	30	84	125	70	420,67	434,50	22,05	K16B-1 52T-H
53	30	84	125	70	428,75	442,50	22,76	K16B-1 53T-H
54	30	84	125	70	436,85	450,60	23,67	K16B-1 54T-H
55	30	84	125	70	444,93	458,70	24,16	K16B-1 55T-H
56	30	84	125	70	453,01	466,80	24,74	K16B-1 56T-H
57	30	84	125	70	461,08	474,90	25,52	K16B-1 57T-H
60	30	93	140	68	485,32	499,10	27,76	K16B-1 60T-H
76	30	93	140	80	614,64	628,40	42,97	K16B-1 76T-H
95	30	93	140	80	768,22	782,00	63,92	K16B-1 95T-H
114	30	93	140	80	921,82	935,60	86,10	K16B-1 114T-H

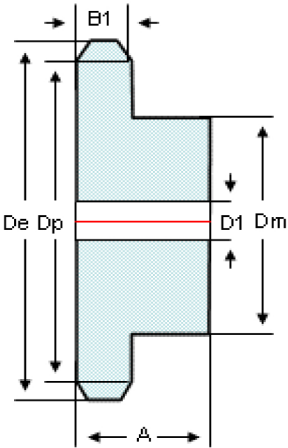

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	25,40 mm
Binnenbreedte	E	=	17,02 mm
Roldiameter	D3	=	15,875 mm
Tandbreedte	B1	=	16,20 mm

materiaal: staal C45