


KETTINGWIELEN - TRIPLEX

Voor rollenketting 16B-3

Vlgs. Din 8187

1" x 17,02 mm

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg
8	20	27	42	95	66,37	77,90	1,19
9	20	33	50	95	74,27	85,80	1,68
10	20	37	56	95	82,19	93,80	2,24
11	25	43	64	100	90,16	101,70	2,86
12	25	48	72	100	98,14	109,70	3,62
13	25	53	80	100	106,13	117,70	4,45
14	25	59	88	100	114,15	125,70	5,37
15	25	64	96	100	122,17	133,70	6,37
16	25	69	104	100	130,20	141,80	7,45
17	25	74	112	100	138,23	149,80	8,60
18	25	80	120	100	146,27	157,80	9,84
19	25	85	128	100	154,32	165,90	11,16
20	25	86	130	100	162,37	173,90	12,36
21	30	86	130	100	170,42	182,00	13,56
22	30	86	130	100	178,48	190,10	14,82
23	30	86	130	100	186,53	198,10	16,15
24	30	86	130	100	194,60	206,20	17,53
25	30	86	130	100	202,66	214,20	18,99
26	30	86	130	100	210,72	222,30	20,34
27	30	86	130	100	218,79	230,40	21,92
28	30	86	130	100	226,86	238,40	23,57
29	30	86	130	100	234,92	246,50	25,27
30	30	86	130	100	243,00	254,60	27,05
31	30	93	140	100	251,07	262,60	29,23
32	30	93	140	100	259,14	270,70	31,13
33	30	93	140	100	267,21	278,80	33,10
34	30	93	140	100	275,28	286,90	35,13
35	30	93	140	100	283,36	294,90	37,23
36	30	93	140	100	291,43	303,00	39,39
37	30	93	140	100	299,51	311,10	41,54
38	30	93	140	100	307,58	319,20	43,90
39	30	93	140	100	315,66	327,20	46,20
40	30	93	140	100	323,73	335,30	48,67
42	30	93	140	100	339,89	353,70	54,40
45	30	106	160	100	364,12	377,90	63,94
46	30	106	160	110	372,20	386,00	67,00
48	30	106	160	110	388,36	402,10	72,89
50	30	106	160	100	404,52	418,30	78,58
57	40	119	180	110	461,08	474,90	103,03
60	40	119	180	110	485,32	499,10	114,40
76	40	119	180	110	614,64	628,40	181,86
95	40	119	180	110	768,22	782,00	283,85
114	40	119	180	110	921,82	935,60	290,00

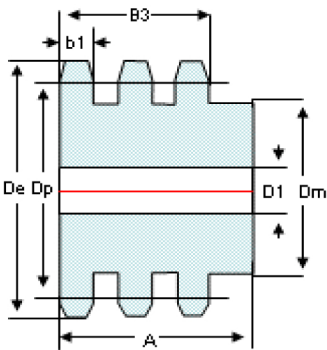

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	25,40 mm
Binnenbreedte	E	=	17,02 mm
Roldiameter	D3	=	15,875 mm
Tandbreedte	b1	=	15,80 mm
	B3	=	79,60 mm

materiaal: staal C45