


KETTINGWIELEN - DUPLEX

Voor rollenketting 20B-2 Vlgs. Din 8187 1 1/4" x 3/4"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg
8	20	35	53	75	82,96	96,00	1,58
9	20	42	63	75	92,84	106,50	2,19
10	20	47	70	75	102,74	117,00	2,85
11	25	53	80	80	112,68	127,20	3,72
12	25	60	90	80	122,68	137,40	4,66
13	25	66	100	80	132,65	147,50	5,70
14	25	73	110	80	142,68	157,60	6,84
15	25	80	120	80	152,72	167,60	8,08
16	30	80	120	80	162,75	177,70	8,90
17	30	80	120	80	172,78	187,70	9,92
18	30	80	120	80	182,85	197,80	11,00
19	30	80	120	80	192,91	207,90	12,16
20	30	80	120	80	202,98	217,90	13,38
21	30	93	140	80	213,04	228,00	15,49
22	30	93	140	80	223,11	238,00	16,86
23	30	93	140	80	233,17	248,10	18,29
24	30	93	140	80	243,23	258,10	19,79
25	30	93	140	80	253,33	268,20	21,36
26	30	99	150	80	263,40	278,30	23,45
27	30	99	150	80	273,48	288,40	25,15
28	30	99	150	80	283,56	298,50	26,93
29	30	99	150	80	293,65	308,60	28,77
30	30	99	150	80	303,75	318,70	30,69
31	30	99	150	80	313,85	328,70	32,67
32	30	99	150	80	323,91	338,80	34,72
33	30	99	150	80	334,01	349,00	36,99
34	30	99	150	80	344,10	359,10	39,03
35	30	99	150	80	354,20	369,20	41,28
36	30	99	150	80	364,30	379,20	43,61
37	30	99	150	80	374,39	389,30	46,01
38	30	99	150	80	384,49	399,40	48,46
39	30	99	150	80	394,59	409,50	51,11
40	30	99	150	80	404,66	419,60	53,60
45	30	106	160	90	455,17	470,10	71,32
46	30	106	160	90	465,26	480,20	74,34
50	30	106	160	90	505,65	520,60	87,08
57	30	106	160	100	576,36	591,30	112,45
76	30	120	180	100	768,32	783,20	200,96
95	30	120	180	100	960,28	975,20	313,59

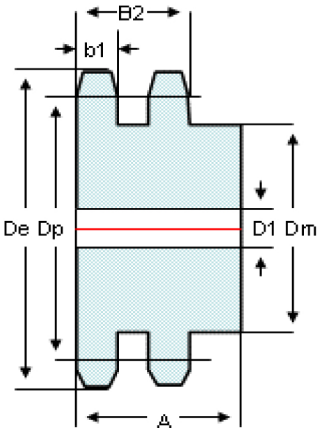

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	31,75 mm
Binnenbreedte	E	=	19,56 mm
Roldiameter	D3	=	19,05 mm
Tandbreedte	b1	=	18,20 mm
	B2	=	54,60 mm

materiaal: staal C45