


KETTINGWIELEN - SIMPLEX

Voor rollenketting 28B-1 Vlg. Din 8187 1 3/4" x 31,0 mm

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht	Artikel code
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg	
8	25		74	70	116,15	132,00	2,86	K28B-1 08T-H
9	25		88	70	129,96	146,00	4,00	K28B-1 09T-H
10	25		100	70	143,84	160,60	5,18	K28B-1 10T-H
11	25		112	70	157,77	174,80	6,51	K28B-1 11T-H
12	25		125	70	171,74	188,70	8,04	K28B-1 12T-H
13	25		125	70	185,74	203,20	8,88	K28B-1 13T-H
14	25		130	70	199,76	217,80	9,79	K28B-1 14T-H
15	25		125	70	213,79	232,00	10,77	K28B-1 15T-H
16	30		160	75	227,84	246,00	14,96	K28B-1 16T-H
17	30		160	75	241,90	260,20	16,09	K28B-1 17T-H
18	30		160	75	255,98	274,50	17,28	K28B-1 18T-H
19	30		160	75	270,06	288,60	18,56	K28B-1 19T-H
20	30		160	75	284,15	302,70	19,90	K28B-1 20T-H
21	30		170	75	298,24	316,70	21,31	K28B-1 21T-H
22	30		170	75	312,34	330,80	22,80	K28B-1 22T-H
23	30		170	75	326,44	344,90	24,36	K28B-1 23T-H
24	30		170	75	340,55	359,10	26,00	K28B-1 24T-H
25	30		170	75	354,66	373,20	27,70	K28B-1 25T-H
26	30		170	75	368,77	387,30	29,48	K28B-1 26T-H
27	30		170	75	382,88	401,40	31,36	K28B-1 27T-H
28	30		170	75	397,00	415,50	33,26	K28B-1 28T-H
29	30		170	75	411,12	429,60	35,70	K28B-1 29T-H
30	30		170	75	425,24	443,70	37,33	K28B-1 30T-H
31	30		180	75	439,37	457,90	40,15	K28B-1 31T-H
32	30		180	75	453,49	472,00	43,59	K28B-1 32T-H
33	30		180	75	467,62	486,01	45,30	K28B-1 33T-H
34	30		180	75	481,75	500,30	48,24	K28B-1 34T-H
35	30		180	75	495,88	514,40	50,57	K28B-1 35T-H
36	30		180	75	510,01	528,50	53,18	K28B-1 36T-H
37	30		180	75	524,14	542,80	56,28	K28B-1 37T-H
38	30		180	75	538,27	556,80	58,40	K28B-1 38T-H
39	30		180	75	552,40	570,90	61,20	K28B-1 39T-H
40	30		180	75	566,54	585,00	63,92	K28B-1 40T-H
45	30		180	90	637,22	655,70	79,12	K28B-1 45T-H
50	30		180	90	707,91	726,40	96,00	K28B-1 50T-H
57	30		180	100	806,89	825,40	125,13	K28B-1 57T-H
76	30		200	100	1075,62	1094,10	215,46	K28B-1 76T-H

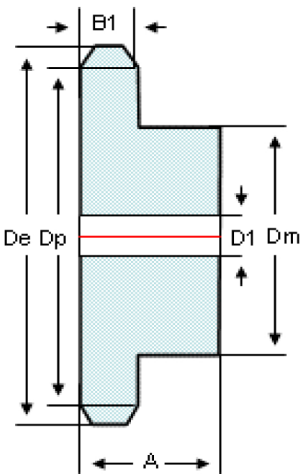

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	44,45 mm
Binnenbreedte	E	=	31,00 mm
Roldiameter	D3	=	27,94 mm
Tandbreedte	B1	=	29,40 mm

materiaal: staal C45