


KETTINGWIELEN - SIMPLEX

Voor rollenketting 32B-1 Vlg. Din 8187 2" x 31,0 mm

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht	Artikel code
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg	
8	30		85	80	132,75	152,00	4,20	K32B-1 08T-H
9	30		100	80	148,53	168,00	5,78	K32B-1 09T-H
10	30		115	80	164,39	184,00	7,60	K32B-1 10T-H
11	30		125	80	180,31	200,00	9,26	K32B-1 11T-H
12	30		133	80	196,28	216,00	10,91	K32B-1 12T-H
13	30		145	80	212,27	232,00	13,05	K32B-1 13T-H
14	30		155	80	228,29	249,30	14,25	K32B-1 14T-H
15	30		160	80	244,33	265,30	15,53	K32B-1 15T-H
16	30		160	90	260,39	281,40	19,87	K32B-1 16T-H
17	30		170	90	276,46	297,50	21,35	K32B-1 17T-H
18	30		170	90	292,55	313,80	22,92	K32B-1 18T-H
19	30		170	90	308,64	330,00	24,53	K32B-1 19T-H
20	30		180	90	324,74	346,30	28,50	K32B-1 20T-H
21	40		180	90	340,84	362,60	30,36	K32B-1 21T-H
22	40		180	90	356,95	378,90	32,31	K32B-1 22T-H
23	40		180	90	373,07	395,10	34,36	K32B-1 23T-H
24	40		180	90	389,19	411,20	36,50	K32B-1 24T-H
25	40		180	90	405,32	427,30	38,74	K32B-1 25T-H
26	40		180	90	421,45	443,40	41,07	K32B-1 26T-H
27	40		180	90	437,58	459,50	43,34	K32B-1 27T-H
28	40		180	90	453,71	475,70	46,01	K32B-1 28T-H
29	40		180	90	469,85	491,80	48,91	K32B-1 29T-H
30	40		180	90	485,99	508,00	51,34	K32B-1 30T-H
31	40		180	90	502,13	524,10	55,75	K32B-1 31T-H
32	40		180	90	518,28	540,20	59,89	K32B-1 32T-H
33	40		180	90	534,42	556,40	63,10	K32B-1 33T-H
34	40		180	90	550,57	572,50	66,31	K32B-1 34T-H
35	40		180	90	566,72	588,70	69,16	K32B-1 35T-H
36	40		180	90	582,86	604,80	72,34	K32B-1 36T-H
37	40		180	90	599,01	621,00	75,98	K32B-1 37T-H
38	40		180	90	615,16	637,10	79,28	K32B-1 38T-H
39	40		180	90	631,32	653,30	83,16	K32B-1 39T-H
40	40		180	90	647,47	669,40	86,71	K32B-1 40T-H
45	40		200	100	728,25	750,20	118,87	K32B-1 45T-H
50	40		200	100	809,04	831,00	140,96	K32B-1 50T-H
57	40		200	100	922,16	944,10	175,86	K32B-1 57T-H
76	40		200	110	1229,28	1251,30	294,00	K32B-1 76T-H

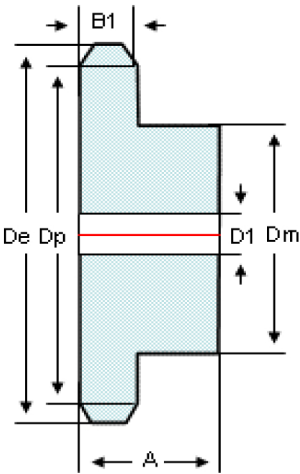

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	50,8 mm
Binnenbreedte	E	=	31,00 mm
Roldiameter	D3	=	29,21 mm
Tandbreedte	B1	=	29,40 mm

materiaal: staal C45