

KETTINGWIELEN - SIMPLEX


Voor rollenketting 081

Vlgs. Din 8187

1/2" x 1/8"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg
8	8	14	21	14	33,19	39,50	0,04
9	8	16	25	14	37,13	43,40	0,06
10	8	18	28	14	41,10	47,40	0,07
11	8	20	31	16	45,08	51,40	0,10
12	8	23	35	16	49,07	55,40	0,13
13	8	25	39	16	53,07	59,40	0,16
14	8	28	43	16	57,07	63,40	0,19
15	8	31	47	16	61,08	67,40	0,23
16	10	32	50	18	65,10	71,40	0,29
17	10	32	50	18	69,11	75,40	0,30
18	10	32	50	18	73,14	79,50	0,31
19	10	32	50	18	77,16	83,50	0,32
20	10	32	50	18	81,18	87,50	0,33
21	12	41	60	20	85,21	91,50	0,48
22	12	41	60	20	89,24	95,50	0,49
23	12	41	60	20	93,27	99,60	0,51
24	12	41	60	20	97,30	103,60	0,52
25	12	41	60	20	101,33	107,60	0,53
26	16	47	70	20	105,36	111,70	0,67
27	16	47	70	20	109,40	115,70	0,69
28	16	47	70	20	113,43	119,70	0,70
29	16	47	70	20	117,46	123,80	0,72
30	16	47	70	20	121,50	127,80	0,74
31	16	47	70	20	125,53	131,80	0,76
32	16	47	70	20	129,57	135,90	0,77
33	16	47	70	20	133,60	139,90	0,79
34	16	47	70	20	137,64	143,90	0,81
35	16	47	70	20	141,68	148,00	0,83
36	16	47	70	25	145,72	152,00	1,00
37	16	47	70	25	149,75	156,10	1,02
38	16	47	70	25	153,79	160,10	1,04
39	16	47	70	25	157,83	164,10	1,06
40	16	47	70	25	161,87	168,20	1,09

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

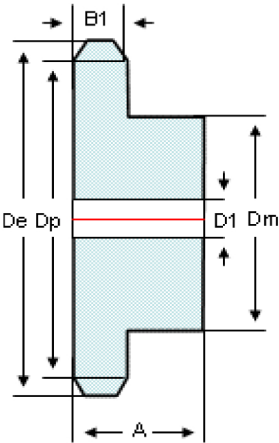

Steek	P	= 12,70 mm
Binnenbreedte	E	= 4,880 mm
Roldiameter	D3	= 7,750 mm
Tandbreedte	B1	= 3,000 mm

materiaal: staal C45