



Easy Mounting Type Cam Followers

Selectable product specifications


Material type	No symbol	 High carbon steel
	F	 Stainless steel
Roller guide type	No symbol	 With cage
	V	 Full complement roller
Seal structure	No symbol	 Sealed type
Shape of outer ring outer diameter surface	No symbol	 Cylindrical outer ring

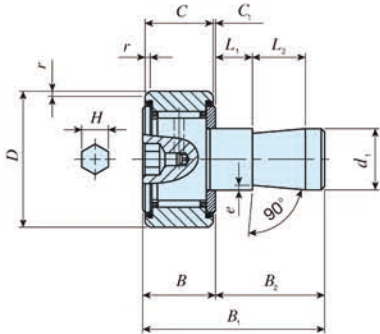

Stud diameter d_1 6-10mm⁽¹⁾



Stud diameter d_1 12-20mm⁽²⁾



Stud diameter mm	Identification number With cage	Mass (Ref.) g	Nominal dimensions mm													Mounting dimensions mm					Basic dynamic load rating C N	Basic static load rating C_0 N	Maximum static allowable load N
			D	C	d_1	$B_{\max}$	$B_{1\max}$	B_2	C_1	L_1		L_2	H	e	$r_{s\min}^{(3)}$	D_2	Tolerance	Minimum t	Minimum f	h (Ref.)			
6	CF-SFU- 6 B	19.5	16	11	6	12.2	32	19.8	0.6	5		10	3	0.3	0.3	6	+0.012 0	20	11	10	3 660	3 650	1 950
8	CF-SFU- 8 B	29	19	11	8	12.2	32	19.8	0.6	5		10	4	0.5	0.3	8	+0.015 0	20	13	10	4 250	4 740	4 620
10	CF-SFU- 10 B CF-SFU- 10-1 B	44 59	22 26	12 12	10 10	13.2 13.2	33 33	19.8 19.8	0.6 0.6	5 5		10 10	4 4	0.5 0.5	0.3 0.3	10 10		20 20	16 16	10 10	5 430 5 430	6 890 6 890	6 890 6 890
12	CF-SFU- 12 B CF-SFU- 12-1 B	94 104	30 32	14 14	12 12	15.2 15.2	35 35	19.8 19.8	0.6 0.6	5 5		10 10	6 6	1 1	0.6 0.6	12 12	+0.018 0	20 20	21 21	10 10	7 910 7 910	9 790 9 790	9 790 9 790
16	CF-SFU- 16 B	164	35	18	16	19.6	44.5	24.9	0.8	10		10	6	1	0.6	16		25	26	15	12 000	18 300	18 300
18	CF-SFU- 18 B	235	40	20	18	21.6	46.5	24.9	0.8	10		10	8	1	1	18		25	29	15	14 800	25 200	25 200
20	CF-SFU- 20 B CF-SFU- 20-1 B	435 360	52 47	24 24	20 20	25.6 25.6	50.5 50.5	24.9 24.9	0.8 0.8	10 10		10 10	8 8	1 1	1 1	20 20	+0.021 0	25 25	34 34	15 15	20 700 20 700	34 600 34 600	34 600 34 600

Note ⁽¹⁾ An oil hole (grease feed plug) is provided for the stud head.
⁽²⁾ An oil hole (grease nipple) is provided for the stud head.
⁽³⁾ This represents the minimum tolerance dimensions of the chamfer dimensions r .
Remark: Grease is pre-packed.