
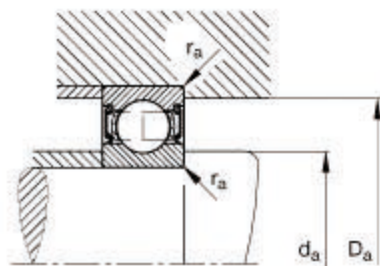


Deep groove ball bearings S6002-2RSR

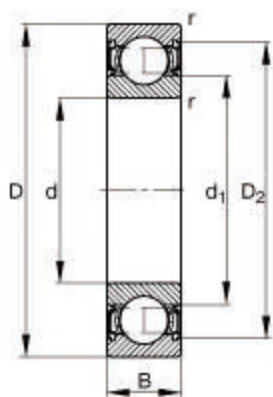

d	15 mm	
D	32 mm	
B	9 mm	
D ₂	28,4 mm	
D _{a max}	30 mm	
d ₁	20,5 mm	
d _{a min}	17 mm	
r _{a max}	0,3 mm	
r _{min}	0,3 mm	
m	0,031 kg	Mass
C _r	4750 N	Basic dynamic load rating, radial
C _{0r}	2270 N	Basic static load rating, radial
n _G	16000 1/min	Limiting speed
n _B	0 1/min	Reference speed
C _{ur}	134 N	Fatigue limit load, radial