



# Deep groove ball bearings S6206-2RSR

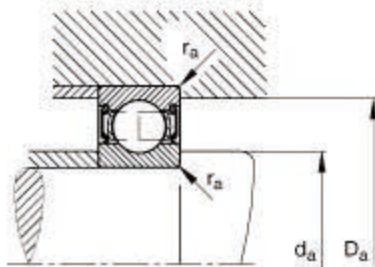

|        |                                           |
|--------|-------------------------------------------|
| d      | 30 mm                                     |
| D      | 62 mm                                     |
| B      | 16 mm                                     |
| D2     | 54,9 mm                                   |
| Da max | 56,4 mm                                   |
| d1     | 40 mm                                     |
| da min | 35,6 mm                                   |
| ra max | 1 mm                                      |
| rmin   | 1 mm                                      |
| m      | 0,211 kg Mass                             |
| Cr     | 16530 N Basic dynamic load rating, radial |
| Cor    | 9080 N Basic static load rating, radial   |
| ng     | 7500 1/min Limitingspeed                  |
| nb     | 0 1/min Reference speed                   |
| Cur    | 680 N Fatigue limit load, radial          |

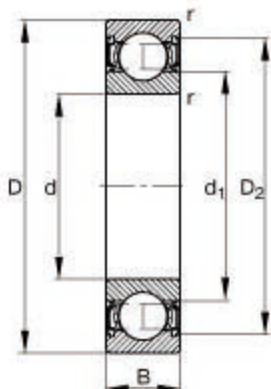