


Tensioner Device

Sprocket wheel N

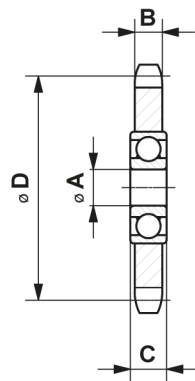

Part no.	Type	Roller chain		Number of teeth	A	B	C	D	Weight [kg]
		ANSI	DIN 8187						
	N $\frac{3}{8}$ " – 10	35	ISO 06 B	15	10	5.3	9	45.81	0.06
	N $\frac{1}{2}$ " – 10	40	ISO 08 B	15	10	7.2	9	61.08	0.15
	N $\frac{1}{2}$ " – 12	40	ISO 08 B	15	12	7.2	12	61.08	0.15
	N $\frac{5}{8}$ " – 12	50	ISO 10 B	15	12	9.1	12	76.36	0.27
	N $\frac{5}{8}$ " – 20	50	ISO 10 B	15	20	9.1	15	76.36	0.29
	N $\frac{3}{4}$ " – 12	60	ISO 12 B	15	12	11.1	12	91.63	0.47
	N $\frac{3}{4}$ " – 20	60	ISO 12 B	15	20	11.1	15	91.63	0.47
	N1" – 20	80	ISO 16 B	13	20	16.1	15	106.14	0.88
	N1 $\frac{1}{4}$ " – 20	100	ISO 20 B	13	20	18.5	15	132.67	1.60
	N1 $\frac{1}{2}$ " – 20	120	ISO 24 B	11	20	24.1	15	135.23	1.93

Allows accurate positioning of relevant chain track.
Ball-bearings 2Z/C3, permanently lubricated.
Working temperature: –40 ° to +100 °C.
If no other units are specified, the numbers given are in mm.