



16101-2RS1

Dimensions

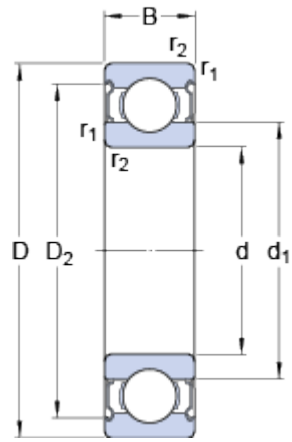

d	12	mm
D	30	mm
B	8	mm
d ₁	≈ 16.7	mm
D ₂	≈ 24.72	mm
r _{1,2}	min. 0.3	mm

Abutment dimensions

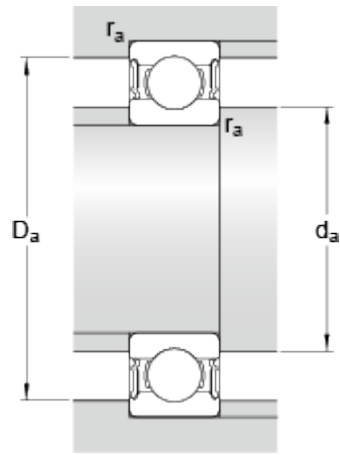

d _a	min.	14.4	mm
d _a	max.	16.6	mm
D _a	max.	27.6	mm
r _a	max.	0.3	mm

Calculation data

Basic dynamic load rating	C	5	kN
Basic static load rating	C ₀	2.3	kN
Fatigue load limit	P _u	0.1	kN
Limiting speed		16000	r/min
Calculation factor	k _r	0.025	
Calculation factor	f ₀	13	

Mass

Mass bearing	0.028	kg
--------------	-------	----