


2311 K


Dimensions

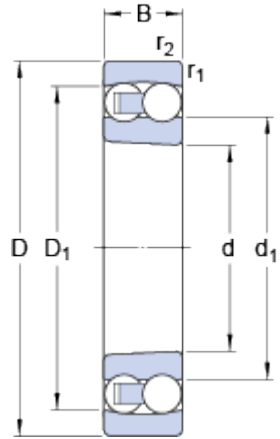

d	55	mm
D	120	mm
B	43	mm
d ₁	≈ 72	mm
D ₁	≈ 101	mm
r _{1,2}	min. 2	mm

Tapered bore, taper 1:12

Abutment dimensions

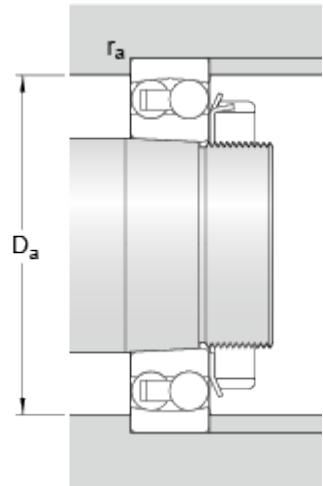

D _a	max. 109	mm
r _a	max. 2	mm

Calculation data

Basic dynamic load rating	C	76.1	kN
Basic static load rating	C ₀	24	kN
Fatigue load limit	P _u	1.25	kN
Reference speed		11000	r/min
Limiting speed		7500	r/min
Permissible angular misalignment	α	3	°
Calculation factor	k _r	0.05	
Calculation factor	e	0.4	
Calculation factor	Y ₀	1.6	
Calculation factor	Y ₁	1.6	
Calculation factor	Y ₂	2.4	

Mass

Mass bearing	2	kg
--------------	---	----

