




7304 BEP


Popular item

Dimensions

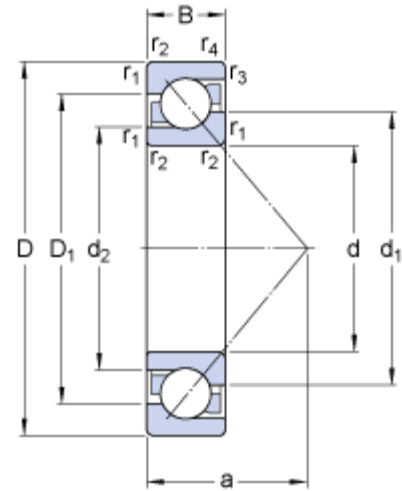

d	20	mm
D	52	mm
B	15	mm
d ₁	33.15	mm
d ₂	26.75	mm
D ₁	40.5	mm
a	22.8	mm
r _{1,2}	min. 1.1	mm
r _{3,4}	min. 0.6	mm

Abutment dimensions

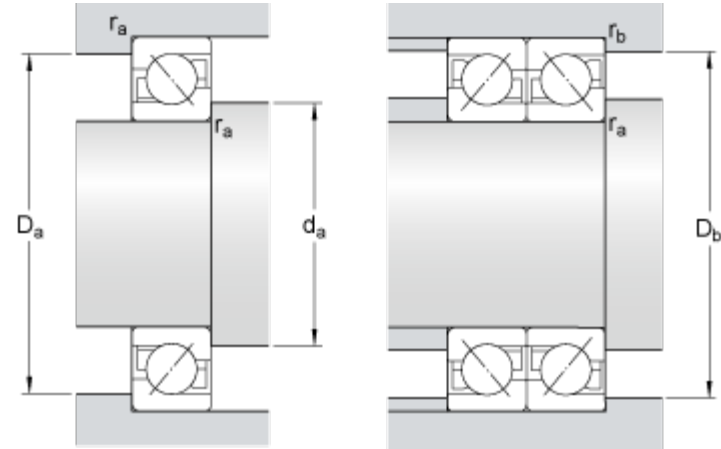

d _a	min. 27	mm
D _a	max. 45	mm
D _b	max. 47.8	mm
r _a	max. 1	mm
r _b	max. 0.6	mm

Calculation data

Basic dynamic load rating	C	17.4	kN
Basic static load rating	C ₀	9.5	kN
Fatigue load limit	P _u	0.4	kN
Reference speed		12000	r/min
Limiting speed		16000	r/min
Calculation factor	A	0.00191	
Calculation factor	k _r	0.1	
Calculation factor	e	1.14	

Single bearing or bearing pair arranged in tandem

Calculation factor	X	0.35	
Calculation factor	Y ₀	0.26	

Calculation factor	Y ₂	0.57	
Bearing pair arranged back-to-back or face-to-face			
Calculation factor	X	0.57	
Calculation factor	Y ₀	0.52	
Calculation factor	Y ₁	0.55	
Calculation factor	Y ₂	0.93	
Mass			
Mass bearing		0.14	kg