




7306 BECBM


SKF Explorer

Dimensions

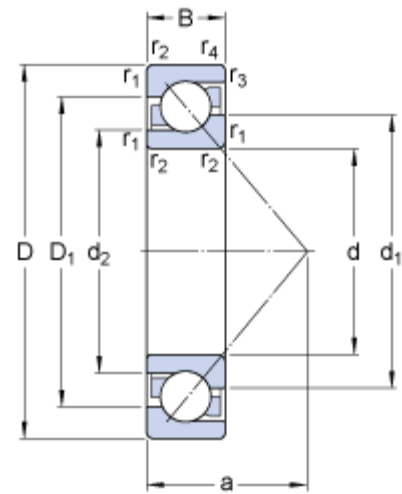

d	30	mm
D	72	mm
B	19	mm
d ₁	≈ 46.5	mm
d ₂	≈ 37.9	mm
D ₁	≈ 56.6	mm
a	31	mm
r _{1,2}	min. 1.1	mm
r _{3,4}	min. 0.6	mm

Abutment dimensions

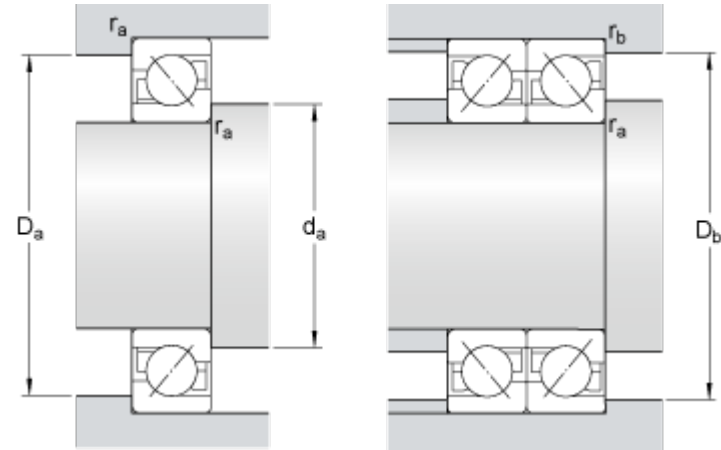

d _a	min. 37	mm
D _a	max. 65	mm
D _b	max. 67.8	mm
r _a	max. 1	mm
r _b	max. 0.6	mm

Calculation data

Basic dynamic load rating	C	35.5	kN
Basic static load rating	C ₀	21.2	kN
Fatigue load limit	P _u	0.9	kN
Reference speed		12000	r/min
Limiting speed		16000	r/min
Calculation factor	A	0.0074	
Calculation factor	k _r	0.1	
Calculation factor	e	1.14	

Single bearing or bearing pair arranged in tandem

Calculation factor	X	0.35	
--------------------	---	------	--

Calculation factor	Y_0	0.26	
Calculation factor	Y_2	0.57	
Bearing pair arranged back-to-back or face-to-face			
Calculation factor	X	0.57	
Calculation factor	Y_0	0.52	
Calculation factor	Y_1	0.55	
Calculation factor	Y_2	0.93	
Mass			
Mass bearing		0.34	kg