


PWM 202430

Dimensions

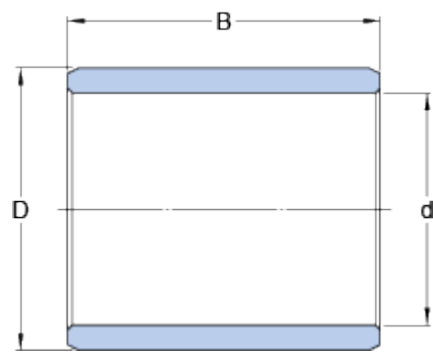

d	20	mm
D	24	mm
B	30	mm

Recommended fits

Tolerance shaft	h8
Tolerance housing	H7

Calculation data

Specific dynamic load factor	K	140	N/mm²
Specific static load factor	K ₀	200	N/mm²
Effective load carrying cross section	A	560	mm²
Permissible sliding velocity	v	min.	0 m/s
Permissible sliding velocity	v	max.	0.5 m/s
Coefficient of friction	μ	min.	0.03
Coefficient of friction	μ	max.	0.08

Mass

Mass bushing	0.0078	kg
--------------	--------	----