


PWM 505850

Dimensions

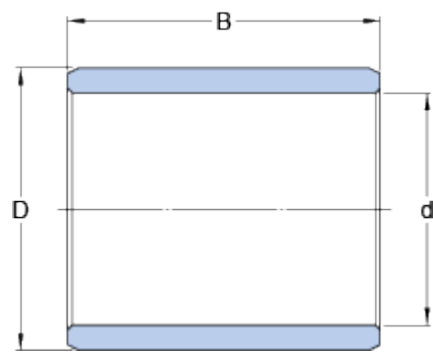

d	50	mm
D	58	mm
B	50	mm

Recommended fits

Tolerance shaft	h8
Tolerance housing	H7

Calculation data

Specific dynamic load factor	K	140	N/mm²
Specific static load factor	K ₀	200	N/mm²
Effective load carrying cross section	A	2400	mm²
Permissible sliding velocity	v	min. 0	m/s
Permissible sliding velocity	v	max. 0.5	m/s
Coefficient of friction	μ	min. 0.03	
Coefficient of friction	μ	max. 0.08	

Mass

Mass bushing	0.063	kg
--------------	-------	----