


# PWM 556370

## Dimensions

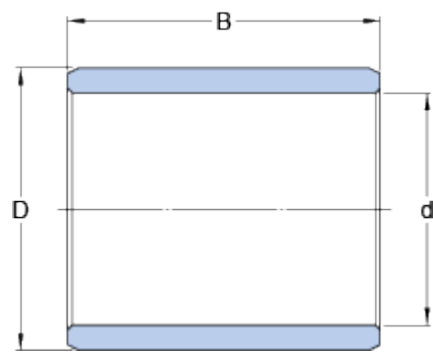

|   |    |    |
|---|----|----|
| d | 55 | mm |
| D | 63 | mm |
| B | 70 | mm |

## Recommended fits

|                   |    |
|-------------------|----|
| Tolerance shaft   | h8 |
| Tolerance housing | H7 |

## Calculation data

|                                       |                |      |         |
|---------------------------------------|----------------|------|---------|
| Specific dynamic load factor          | K              | 140  | N/mm²   |
| Specific static load factor           | K <sub>0</sub> | 200  | N/mm²   |
| Effective load carrying cross section | A              | 3740 | mm²     |
| Permissible sliding velocity          | v              | min. | 0 m/s   |
| Permissible sliding velocity          | v              | max. | 0.5 m/s |
| Coefficient of friction               | μ              | min. | 0.03    |
| Coefficient of friction               | μ              | max. | 0.08    |

## Mass

|              |       |    |
|--------------|-------|----|
| Mass bushing | 0.097 | kg |
|--------------|-------|----|