
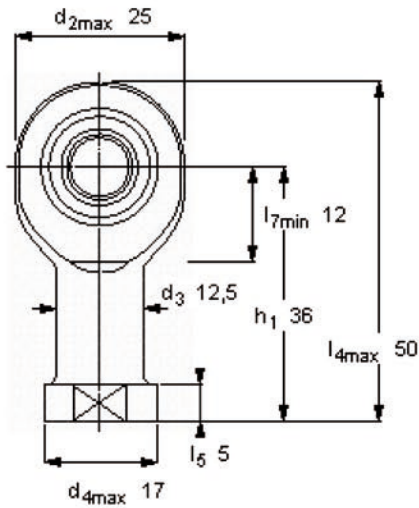


SIKB...F

Maintenance-free rod ends, female thread

Principal dimensions						Angle of tilt	Basic load ratings		Designation
d	d2 max	B	G 6H	C1 max	h1	±	dynamic C	static C0	Rod end with right or left-hand thread
mm						degrees	kN		-
8	25	12	M 8	9	36	14	7,1	11,4	SIKB 8 F

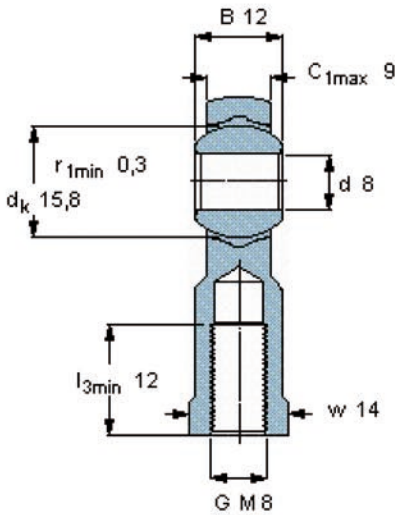

Tolerances

d3 6H
w h14

Specific load factor

K 50

Material constant

KM 530