
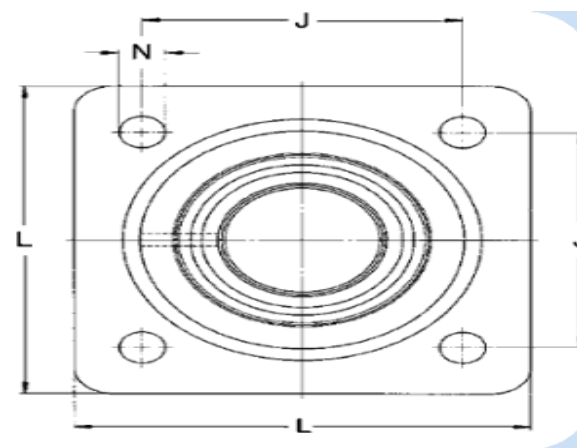


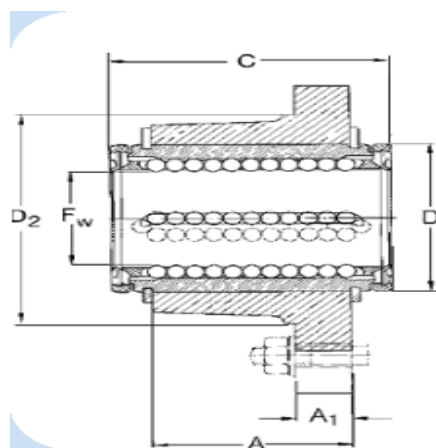

Dimensions

Fw mm	A	A1	C	Da	D2	J	L	N1)
12	20	8	32	22	32	30	42	5,5
16	22	8	36	26	38	35	50	5,5
20	28	10	45	32	46	42	60	6,6
25	40	12	58	40	58	54	74	6,6
30	48	14	68	47	66	60	84	9
40	56	16	80	62	90	78	108	11
50	72	18	100	75	110	98	130	11
60	95	22	125	90	135	120	160	13,5
80	125	25	165	120	180	155	200	13,5

Basic load ratings

dyn.
C
N

stat.
C0

Mass

kg

Designations

Linear bearing unit 2)
with 2 double lip seals

—

1 160	980	0,113	LVCR 12-2LS
1 500	1 290	0,161	LVCR 16-2LS
2 240	2 040	0,314	LVCR 20-2LS
3 350	3 350	0,655	LVCR 25-2LS
5 600	5 700	0,98	LVCR 30-2LS
9 000	8 150	1,91	LVCR 40-2LS
13 400	12 200	3,27	LVCR 50-2LS
20 400	18 000	5,92	LVCR 60-2LS
37 500	32 000	13,3	LVCR 80-2LS