




Y-bearing plummer block units, cast housing, eccentric locking collar

Principal dimensions					Basic load ratings		Designations		
d	A	H	H1	L	dynamic C	static C0	Bearing unit	Housing	Bearin
mm					kN		-		
25	36	70,5	36,5	130	14	7,8	SY 25 FM	SY 505 M	YET 2

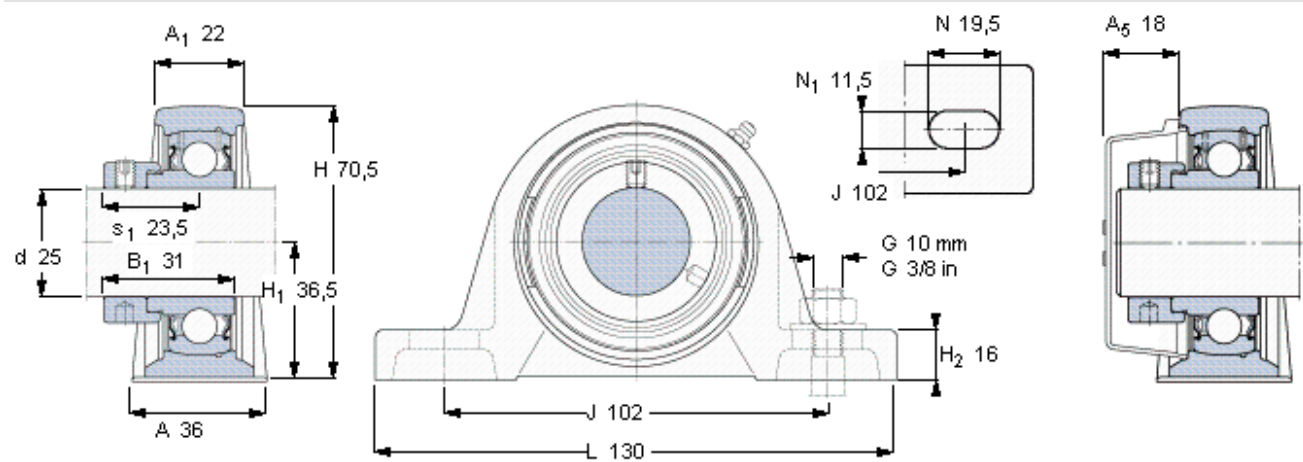

Grub screw	M6x0.7
Recommended tightening torque [Nm]	-
Hexagonal key size [mm]	3
End cover	ECY 20