



Technical data

UKT212H


Bearing units

Grey cast housing, radial insert ball bearing with adapter sleeve, seal with slinger

KIT CONTENT

UK212G2H, T212

VISUAL (S)

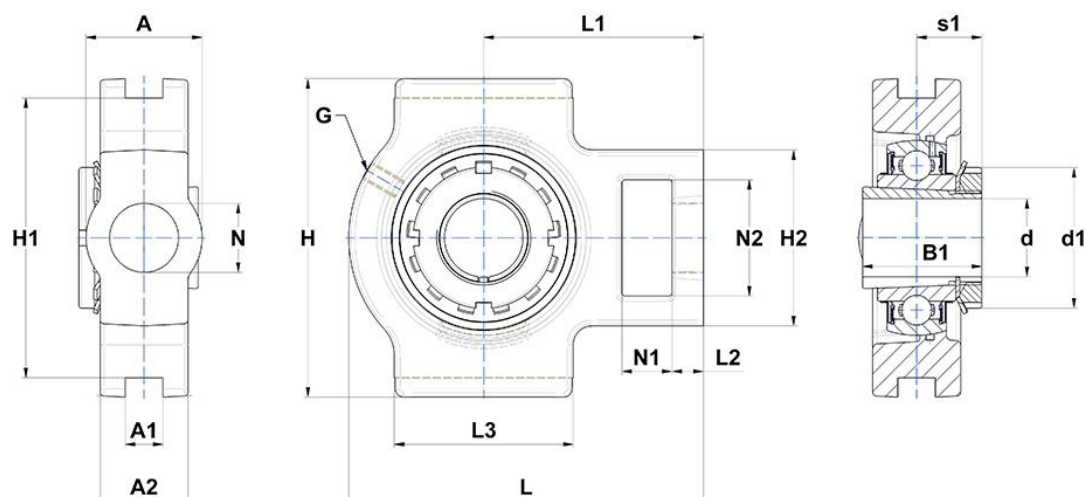

PRODUCT DEFINITION

Brand	SNR
A - Housing width	64 mm
A1 - Width of location slot	22 mm
A2	42 mm
B1 - Overall width Inner Ring	62 mm
d - Shaft diameter	55 mm

PRODUCT DEFINITION

d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	80 mm
G - Grease fitting	M6x1
H - Housing length, width or diameter	146 mm
H1 - Distance between location slots	130 mm
H2 - Housing height / width	102 mm
L - Housing length	194 mm
L1 - Distance attachment end face to bearing centerline	119 mm
L2 - Thickness of attachment end	19 mm
L3 - Length of guidance slot/face	102 mm
N - Mounting hole dimension	35 mm
N1 - Length of attachment slot	32 mm
N2 - Height of attachment slot	64 mm
s1 - Distance nut to middle of bearing raceway	31 mm

PRODUCT PERFORMANCE

C - Dynamic load rating	52,5 kN
C0 - Static load rating	32,8 kN
Operating temperature min.	253,15 °K
Operating temperature max.	373,15 °K

OTHER FEATURES

Mass	4,71 kg
-------------	---------