



The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number SUCPLFL204-12/F, Corrosion Resistant Two-Bolt Flanged Housed Units - Set Screw Locking

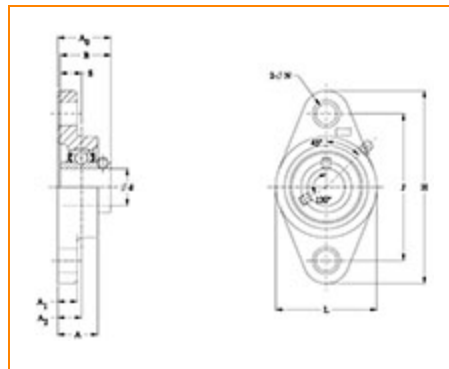

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications



Housing Material	Cast Thermoplastic (Polymer)
Bearing Number	SUC204-12/F
Lubrication Type	Standard Food Safe Grease
Bore Size	3/4 in
Weight	0.5 Kg 1.1 lb
Locking Style	Set Screw Locking
Housing Construction	Two-Bolt Flange

Dimensions

Total Length H	4.449 in 113 mm
Total Height L	2.559 in 65 mm
Bolt Hole Spacing J	3.543 in 90 mm
Housing Width A	1.063 in 27 mm
Bolt Hole Size N	0.433 in 11 mm
Center of Bearing from Housing End A2	0.591 in 15 mm
Center of Bearing from Bearing End S	0.5 in 12.7 mm
Inner Ring Width B	1.220 in 31.00 mm
Bearing_Center of Bearing from End S	0.500 in 12.7 mm
Dimension A2	0.591 in 15.00 mm

Basic Load Ratings

Static Load Rating	1203 lbf 5350 N
Dynamic Load Rating	2451 lbf 10900 N

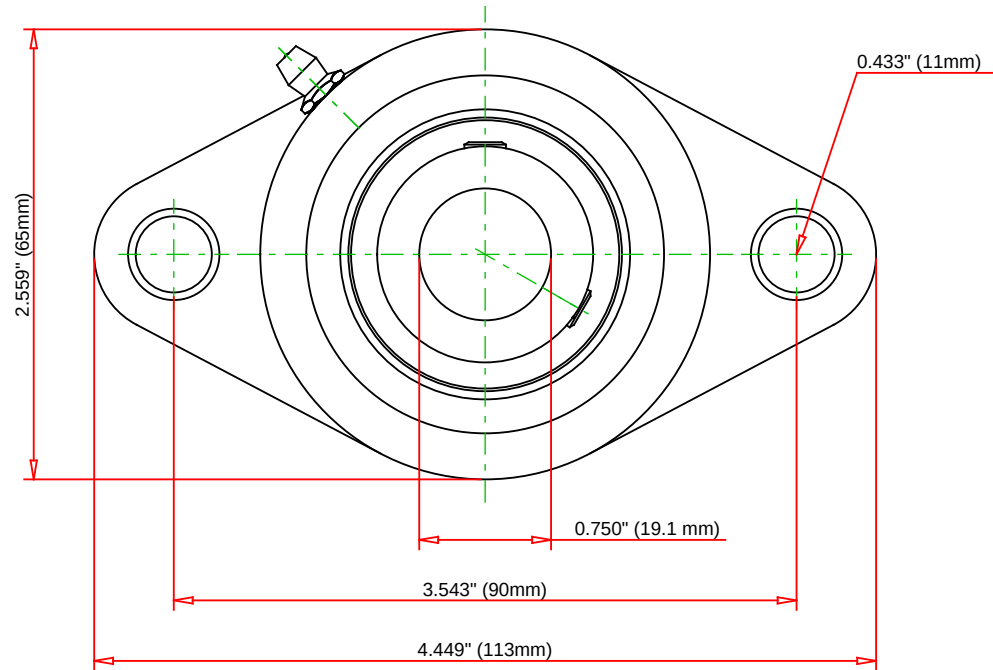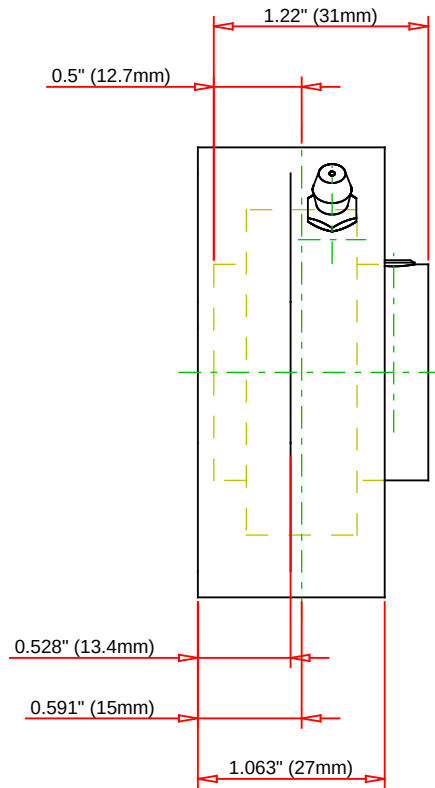

Bearing Number	SUC204-12/F			
Load Ratings - C _r	2451	lbf	10900	N
Load Ratings - C _{0r}	1203	lbf	5350	N
Weight	1.1	lb	0.5	kg
Housing Material	Cast Thermoplastic (Polymer)			

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

SUCPLFL204-12/F
Corrosion Resistant Two-Bolt Flanged
Housed Units - Set Screw Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY