


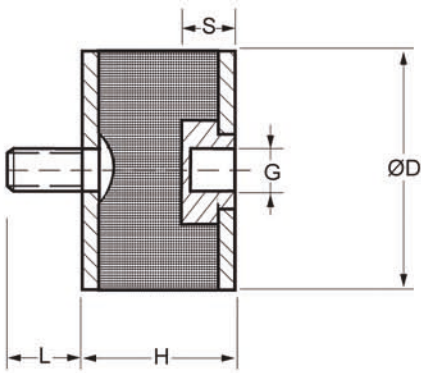

Cylindrical mountings type B

Type D/H	GxL (S)	Art.No. 60° IRH	60° IRH			
			Compression load		Shear load	
			k _{comp} (N/mm)	F _{max} (N)	k _{shear} (N/mm)	F _{max} (N)
B 10/10	M4x10(4)	1255930	58	56	10	23
B 10/15	M4x10(4)	319100	34	52	6	23
B 15/15	M4x10(4)	319110	79	124	13	52
B 20/15	M6x15(6)	1255960	159	238	25	92
B 20/20	M6x15(6)	1255970	105	220	18	92
B 20/25	M6x15(6)	319120	79	213	14	92
B 25/15	M6x15(6)	1255990	269	404	38	144
B 25/20	M6x15(6)	319130	172	360	27	144
B 25/25	M6x15 (6)	319140	127	342	21	144
B 25/30	M6x15(6)	319150	101	333	17	144
B 30/15	M8x20(8)	319160	494	676	61	208
B 30/20	M8x20 (8)	1256040	285	561	42	208
B 30/25	M8x20(8)	319170	201	516	32	208
B 30/30	M8x20 (8)	1256060	156	495	26	208
B 30/40	M8x20(8)	319180	109	475	19	208
B 40/30	M8x20(8)	319190	296	937	47	369
B 40/40	M8x20(8)	319200	200	875	34	369
B 50/30	M10x25(10)	319210	515	1595	75	577
B 50/40	M10x25 (10)	319220	334	1433	54	577
B 50/50	M10x25 (10)	1256120	248	1365	42	577
B 75/50	M12x35(12)	319240	632	3396	97	1299
B 75/55	M12x35 (12)	319250	550	3288	87	1299
B 100/40	M16x45 (16)	319260	1914	7994	221	2309
B 100/55	M16x45(16)	319270	1084	6479	155	2309

S = internal thread length