


KETTINGWIELEN - DUPLEX

Voor rollenketting 28B-2 Vlg. Din 8187 1 3/4" x 31,0 mm

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg
8	30		74	120	116,15	132,00	4,75
9	30		88	120	129,96	146,00	6,66
10	30		100	120	143,84	160,60	8,79
11	30		112	120	157,77	174,80	11,19
12	30		125	120	171,74	188,70	13,91
13	30		125	120	185,74	203,20	16,25
14	30		130	120	199,76	217,80	18,81
15	30		145	120	213,79	232,00	22,64
16	30		160	120	227,84	246,00	26,52
17	30		160	120	241,90	260,20	29,74
18	30		160	120	255,98	274,50	33,17
19	30		180	120	270,06	288,60	38,14
20	30		180	120	284,15	302,70	42,04
21	30		180	120	298,24	316,70	49,10
22	30		180	120	312,34	330,80	50,40
23	30		180	120	326,44	344,90	54,92
24	30		180	120	340,55	359,10	59,60
25	30		180	120	354,66	373,20	64,62
26	40		180	120	368,77	387,30	69,28
27	40		180	120	382,88	401,40	74,78
28	40		180	120	397,00	415,50	80,28
29	40		180	120	411,12	429,60	86,71
30	40		180	120	425,24	443,70	92,17
31	40		200	120	439,37	457,90	97,20
32	40		200	120	453,49	472,00	104,30
33	40		200	120	467,62	486,01	111,75
34	40		200	120	481,75	500,30	119,20
35	40		200	120	495,88	514,40	127,17
36	40		200	120	510,01	528,50	134,00
37	40		200	120	524,14	542,80	141,40
38	40		200	120	538,27	556,80	149,90
39	40		200	120	552,40	570,90	159,10
40	40		200	120	566,54	585,00	167,15
45	40		200	120	637,22	655,70	218,10
50	40		220	120	707,91	726,40	267,99
57	40		220	120	806,89	825,40	346,99
76	40		250	130	1075,62	1094,10	615,35

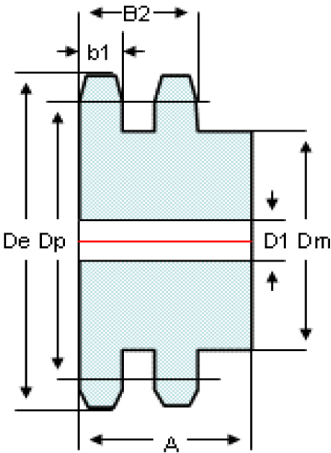

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	44,45 mm
Binnenbreedte	E	=	31,00 mm
Roldiameter	D3	=	27,94 mm
Tandbreedte	b1	=	28,80 mm
	B2	=	88,40 mm

materiaal: staal C45