


KETINGWIELEN - SIMPLEX

Voor rollenketting 05B-1

Vlgs. Din 8187

8,0 x 3,0 mm

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg
8	6	8	13	12	20,90	23,40	0,01
9	6	9	15	12	23,39	25,90	0,01
10	6	11	17	12	25,89	28,40	0,02
11	7	12	18	13	28,39	31,00	0,02
12	7	13	20	13	30,91	33,70	0,03
13	7	15	23	13	33,42	36,70	0,05
14	7	16	25	13	35,95	39,20	0,05
15	7	18	28	13	38,48	41,70	0,07
16	8	19	30	14	41,01	44,20	0,08
17	8	19	30	14	43,53	46,70	0,08
18	8	19	30	14	46,07	49,20	0,09
19	8	19	30	14	48,61	51,70	0,09
20	8	19	30	14	51,14	54,20	0,10
21	8	23	35	14	53,67	57,20	0,12
22	8	23	35	14	56,21	59,40	0,13
23	8	23	35	14	58,75	62,20	0,14
24	8	23	35	14	61,29	64,70	0,14
25	8	23	35	14	63,83	67,20	0,14
26	10	26	40	16	66,37	69,70	0,17
27	10	26	40	16	68,91	72,30	0,20
28	10	26	40	16	71,45	74,70	0,21
29	10	26	40	16	73,99	77,20	0,21
30	10	26	40	16	76,53	80,20	0,22
31	12	26	40	16	79,08	82,70	0,23
32	12	26	40	16	81,61	85,20	0,24
33	12	26	40	16	84,16	87,70	0,24
34	12	26	40	16	86,70	90,20	0,25
35	12	26	40	16	89,24	92,70	0,26
36	12	26	40	16	91,79	95,20	0,26
37	12	26	40	16	94,33	97,70	0,27
38	12	26	40	16	96,88	100,20	0,28
39	12	26	40	16	99,42	102,70	0,32
40	12	26	40	16	101,97	105,20	0,37
45	12	40	60	20	114,69	118,60	0,88
50	12	40	60	20	127,41	131,50	1,00
57	14	53	80	20	145,22	149,30	1,20

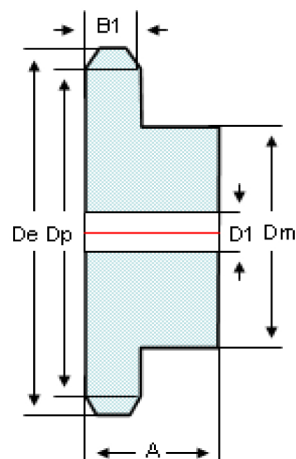

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	8,0 mm
Binnenbreedte	E	=	3,0 mm
Roldiameter	D3	=	5,0 mm
Tandbreedte	B1	=	2,8 mm

materiaal: staal C45