


KETTINGWIELEN - DUPLEX

Voor rollenketting 10B-2 Vlgs. Din 8187 5/8" x 3/8"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg
8	12	16	25	40	41,48	48,40	0,19
9	12	19	30	40	46,42	53,30	0,27
10	12	23	35	40	51,37	58,30	0,36
11	14	26	39	40	56,35	63,20	0,43
12	14	29	44	40	61,34	68,20	0,55
13	14	32	49	40	66,33	73,20	0,68
14	14	35	54	40	71,34	78,20	0,82
15	14	39	59	40	76,36	83,20	0,97
16	16	43	64	45	81,37	88,30	1,26
17	16	46	69	45	86,39	93,30	1,46
18	16	49	74	45	91,42	98,30	1,67
19	16	52	79	45	96,45	103,30	1,90
20	16	55	84	45	101,48	108,40	2,14
21	16	56	85	45	106,51	113,40	2,27
22	16	60	90	45	111,55	118,40	2,54
23	16	63	95	45	116,58	123,50	2,82
24	16	66	100	45	121,62	128,50	3,11
25	16	70	105	45	126,66	133,60	3,15
26	20	73	110	45	131,70	138,60	3,74
27	20	73	110	45	136,74	143,60	3,94
28	20	76	115	45	141,78	148,70	4,28
29	20	76	115	45	146,83	153,70	4,50
30	20	80	120	45	151,87	158,80	4,87
31	20	80	120	45	156,92	163,80	5,10
32	20	80	120	45	161,96	168,90	5,34
33	20	80	120	45	167,01	173,90	5,59
34	20	80	120	45	172,05	178,90	5,84
35	20	80	120	45	177,10	184,00	6,11
36	20	80	120	45	182,15	189,00	6,38
37	20	80	120	45	187,19	194,10	6,66
38	20	80	120	45	192,24	199,10	6,95
39	20	80	120	45	197,29	204,20	7,25
40	20	80	120	45	202,34	209,20	7,55
42	20	85	130	50	212,43	220,80	9,35
45	20	85	130	50	227,58	236,00	10,32
46	20	85	130	50	232,63	241,00	10,67

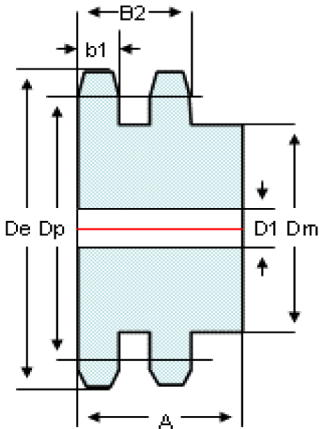

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.


Steek	P	=	15,875 mm
Binnenbreedte	E	=	9,650 mm
Roldiameter	D3	=	10,16 mm
Tandbreedte	b1	=	9,000 mm
	B2	=	25,50 mm

materiaal: staal C45

KETTINGWIELEN - DUPLEX

Voor rollenketting 10B-2 Vlgs. Din 8187 5/8" x 3/8"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht
	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg
48	20	85	130	50	242,73	251,10	11,40
50	20	85	130	50	252,82	261,20	12,11
51	25	85	130	60	257,87	266,30	12,61
52	25	85	130	50	262,92	271,30	13,12
53	25	85	130	60	267,97	276,40	13,67
54	20	85	130	50	273,03	281,40	14,01
55	20	85	130	50	278,08	286,50	14,60
56	25	85	130	60	283,13	291,50	15,18
57	20	85	130	50	288,18	296,60	15,74
60	20	85	130	63	303,33	311,70	16,40
65	25	85	130	63	328,58	337,00	
70	25	85	130	63	353,84	362,20	
76	20	85	130	63	384,15	392,50	24,93
80	25	85	130	63	404,35	412,70	
86	30	85	130	63			
95	20	85	130	63	480,14	488,50	38,90
114	30	85	130	63	576,13	584,50	

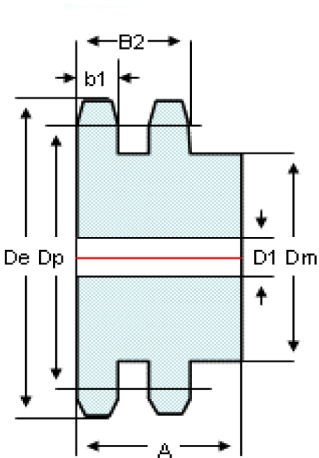

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	15,875 mm
Binnenbreedte	E	=	9,650 mm
Roldiameter	D3	=	10,16 mm
Tandbreedte	b1	=	9,000 mm
	B2	=	25,50 mm

materiaal: staal C45