


KETTINGWIELEN - SIMPLEX

Voor rollenketting 20B-1

Vlgs. Din 8187

1 1/4" x 3/4"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm
8	20	35	53	40	82,96	96,00
9	20	42	63	40	92,84	106,50
10	20	47	70	40	102,74	117,00
11	20	51	77	45	112,68	127,20
12	20	59	88	45	122,68	137,40
13	20	65	98	45	132,65	147,50
14	20	72	108	45	142,68	157,60
15	20	78	118	45	152,72	167,60
16	25	80	120	50	162,75	177,70
17	25	80	120	50	172,78	187,70
18	25	80	120	50	182,85	197,80
19	25	80	120	50	192,91	207,90
20	25	80	120	50	202,98	217,90
21	30	93	140	55	213,04	228,00
22	30	93	140	55	223,11	238,00
23	30	93	140	55	233,17	248,10
24	30	93	140	55	243,23	258,10
25	30	93	140	55	253,33	268,20
26	30	99	150	55	263,40	278,30
27	30	99	150	55	273,48	288,40
28	30	99	150	55	283,56	298,50
29	30	99	150	55	293,65	308,60
30	30	99	150	55	303,75	318,70
31	30	99	150	55	313,85	328,70
32	30	99	150	55	323,91	338,80
33	30	99	150	55	334,01	349,00
34	30	99	150	55	344,10	359,10
35	30	99	150	55	354,20	369,20
36	30	99	150	55	364,30	379,20
37	30	99	150	55	374,39	389,30
38	30	99	150	55	384,49	399,40
39	30	99	150	55	394,59	409,50
40	30	99	150	55	404,66	419,60
45	30	99	150	70	455,17	470,10
46	30	99	150	70	465,26	480,20
50	30	99	150	70	505,65	520,60
57	30	99	150	80	576,36	591,30
76	30	99	150	90	768,32	783,20
95	30	99	150	90	960,28	975,20

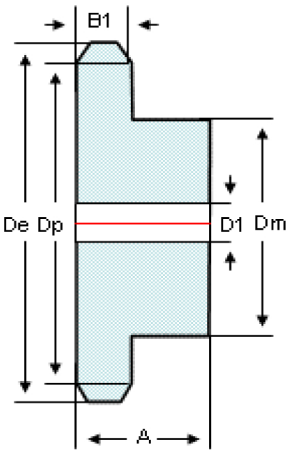

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	31,75 mm
Binnenbreedte	E	=	19,56 mm
Roldiameter	D3	=	19,05 mm
Tandbreedte	B1	=	18,50 mm

materiaal: staal C45