


KETTINGWIELEN - SIMPLEX

Voor rollenketting 24B-1

Vlgs. Din 8187

1 1/2" x 1"

Tanden aantal	Boring		Naaf afmeting		Steek cirkel	Kop cirkel	Gewicht
Z	D1 mm	max. mm	Dm mm	A mm	Dp mm	De mm	ca. kg
8	20	38	58	45	99,55	113,00	1,38
9	20	47	70	45	111,40	125,00	1,90
10	20	53	80	45	123,29	137,00	2,47
11	25	60	90	50	135,21	149,00	3,27
12	25	67	102	50	147,22	161,00	4,09
13	25	75	114	50	159,18	173,00	5,00
14	25	85	128	50	171,22	185,00	6,09
15	25	93	140	50	183,26	197,00	6,84
16	25	93	140	55	195,30	209,00	8,20
17	25	93	140	55	207,34	221,00	8,87
18	25	93	140	55	219,42	233,00	9,59
19	25	93	140	55	231,49	245,50	10,36
20	25	93	140	55	243,57	257,50	11,16
21	30	99	150	60	255,65	270,50	13,35
22	30	99	150	60	267,73	282,50	14,24
23	30	99	150	60	279,80	294,50	15,18
24	30	99	150	60	291,88	307,00	16,16
25	30	99	150	60	304,00	319,00	17,19
26	30	99	150	60	316,08	331,00	18,25
27	30	99	150	60	328,19	343,00	19,37
28	30	99	150	60	340,27	355,00	20,52
29	30	99	150	60	352,39	367,50	21,72
30	30	99	150	60	364,49	379,50	22,97
31	30	99	150	60	376,60	391,50	24,25
32	30	99	150	60	388,71	403,50	25,59
33	30	99	150	60	400,81	415,50	26,96
34	30	99	150	60	412,93	428,00	28,38
35	30	99	150	60	425,04	440,00	29,84
36	30	99	150	60	437,15	452,00	31,34
37	30	99	150	60	449,26	464,00	32,90
38	30	99	150	60	461,37	476,50	34,49
39	30	99	150	60	473,49	488,50	36,76
40	30	99	150	60	485,60	501,50	39,21
45	30	106	160	90	546,20	562,00	54,08
46	30	106	160	90	558,32	574,00	56,03
50	30	106	160	90	606,78	622,50	64,24
57	30	106	160	100	691,63	707,50	80,28
76	30	106	160	100	921,98	939,00	140,54
95	30	106	160	100	1152,33	1169,00	210,67

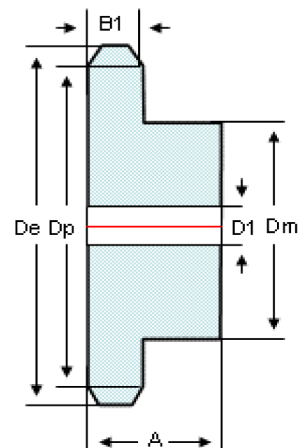

Ook afwijkende tandenaantallen op voorraad, specificaties op aanvraag.

Steek	P	=	38,10 mm
Binnenbreedte	E	=	25,40 mm
Roldiameter	D3	=	25,40 mm
Tandbreedte	B1	=	24,10 mm

materiaal: staal C45