




The Timken Company
1835 Dueber Ave. SW
Canton, OH 44706-0932
Phone: (330) 438-3000 • **Fax:** (330) 458-6006
E-Mail: info@timken.com • **Web site:** www.timken.com

Timken Part Number UCT207, UCT - Take-Up Units

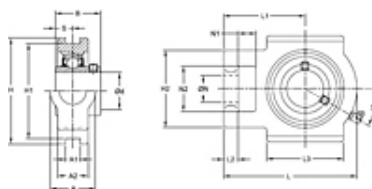

[SPECIFICATIONS](#) · [DIMENSIONS](#) · [BASIC LOAD RATINGS](#)

SPECIFICATIONS

Bearing Number	UC207
Bore Size d	35 mm
Weight	3.500 lb 1.600 Kg

DIMENSIONS

Total Width A	37.00 mm 1.457 in
Slot Width A1	12.00 mm 0.472 in
Socket Width A2	30.00 mm 1.181 in
Total Height H	102.00 mm 4.016 in
Pitch Height H1	89.00 mm 3.504 in
Height H2	64.00 mm 2.520 in

Total Length L	129.00 mm 5.079 in
Shaft Length L1	78.00 mm 3.071 in
Dimension L2	13.00 mm 0.500 in
Slot Length L3	64.00 mm 2.531 in
Adjustment Screw Bore N	22.00 mm 0.866 in
Opening Width N1	16.00 mm 0.625 in
Opening Height N2	37.00 mm 1 15/32 in
Inside Ring Width B	42.90 mm 1.689 in
Center of Bearing from End S	17.50 mm 0.689 in

BASIC LOAD RATINGS

Dynamic Load Rating	5778 lbf 25700 N
Static Load Rating	3462 lbf 15400 N